

# NEWTON ELECTRIQ

One - Stop Shooping Service



**14 YEARS** FOCUS ON ELECTRICAL INDUSTRY

Fast Delivery ! Good Quality ! Good Service !

A collection of electrical components including conduits, boxes, and components on a table. The components are arranged on a white surface against a dark background. The components include various sizes of grey pipes, metal boxes, a blue component, and various electrical parts.The UL and ETL Intertek certification logos are located in the top right corner of the image. The UL logo is a circle with 'UL' and 'us' inside. The ETL logo is a circle with 'ETL' and 'Intertek' inside.

# Newton Electriq

Website: [newtonelectriq.com](http://newtonelectriq.com) Contact: +1 (305) 902-1459

## 1. Who Are We?

Newton Electric has been focusing on the electrical industry since 2012, providing SCH40 PVC Pipe, Electrical Metal Box, Electrical Plastic Box, Electrical Accessory and other products with almost all types of certification for the local market (UL/cUL, ETL/cETL, etc.). We are a professional electrical company that dedicated to provide our customers with best products and solutions in a One Stop Procurement experience.

## 2. What Do We Sell?

We sell items and accessories for commercial, residential and industrial construction, such as metallic and non-metallic electrical boxes, electrical tubes and fittings, ENT&EMT couplings, switches&sockets, wire connectors and others with a total of more than 400 products.

## 3. How Is The Product Quality Guaranteed?

We have two factories with experienced workers working for years. All of them are well trained and familiar with the production of exporting products. Not only that, our sales team will do a final quality and packing check after the production is completed. Photos of the products and packing will be taken and sent to customers before every shipment.

## 4. Why Choose Us Instead Of Other Suppliers?

We have 13 years of manufacturing and exporting experience with a variety of more than 400 products for you to choose from. No need to spend time searching for products in different shops. Everything you need can be found here at the best price. And also, all the products are certified.

## 5 What Other Services Can We Provide?

Delivery Terms: FOB, CFR, CIF, EXW, DDU, Express Delivery and etc.  
Currency: USD, CAD, CNY.  
Payment Type: T/T, L/C, Credit Card, PayPal, Cash.  
Language: English, Mandarin.

# Contents

## 01 Electrical Boxes and Accessories P/01–P/17

- 1.1 Electrical Metal Boxes P/02
- 1.2 Metal Covers, Brackets, Hangers P/07
- 1.3 Metal Box Covers P/08
- 1.4 Electrical Plastic Boxes P/12

## 02 Conduits, Pipes, Fittings and Other Accessories P/18–P/64

- 2.1 EMT Conduits and Fittings P/19
- 2.2 PVC Conduits and Fittings P/36
- 2.3 PVC SCH40 Pressure Pipe & Fittings P/43
- 2.4 Sockets and Wall Plates P/51
- 2.5 Wire Connectors P/57
- 2.6 Cable Wire and Other Accessories P/60

# 1 Electrical Boxes and accessories

The following content shows you the product information of our electrical boxes and accessories for the U.S. market, including but not limited to electrical metal boxes, electrical plastic boxes, plastic covers&brackets, metal covers, brackets&hangers. Most of these products are UL/ETL approved which are 100% qualified for the U.S market.



## 1.1-3 in. x 2 in. Switch Box

No.	Description
ANT500	3 in. x 2 in. Switch Box, Gangable, 2-1/2 in. Deep, Eight 1/2 in. KO's, Plaster Ears
ANT501	3 in. x 2 in. Switch Box, Gangable, 2-1/2 in. Deep, Eight 1/2 in. KO's
ANT502	3 in. x 2 in. Switch Box, Gangable, 2-1/2 in. Deep, Six 1/2 & Two 3/4 in. KO's, Plaster Ears
ANT503	3 in. x 2 in. Switch Box, Gangable, 2-1/2 in. Deep, Four 1/2 in. KO's, KO's, Plaster Ears
ANT504	3 in. x 2 in. Switch Box, Gangable, 2-1/2 in. Deep, One 1/2 & Two 3/4 in. KO's, TS Bracket
ANT505	3 in. x 2 in. Switch Box, Gangable, 2-1/2 in. Deep, Pone 1/2 in. KO's, Plaster Ears
ANT518	3 in. x 2 in. Switch Box, Gangable, 2-1/2 in. Deep, 1/2 in. KO's & BX/MC Clamps, Plaster Ears
ANT519	3 in. x 2 in. Switch Box, Gangable, 3-1/2 in. Deep, Eight 1/2 in. KO's, Plaster Ears
ANT590	3 in. x 2 in. Switch Box, Gangable, 3-1/2 in. Deep, One 1/2 & Eight 3/4 in. KO's & Clamps, Plaster Ears
ANT592	3 in. x 2 in. Switch Box, Gangable, 3-1/2 in. Deep, One 1/2 & Eight 3/4 in. KO's, Plaster Ears
ANT600	3 in. x 2 in. Switch Box, Gangable, 3-1/2 in. Deep, Seven 1/2 in. KO's & BX/MC Clamps, MC, Plaster Ears
ANT601	3 in. x 2 in. Switch Box, Gangable, 3-1/2 in. Deep, Seven 1/2 in. KO's & NM Clamps, Plaster Ears
ANT602	3 in. x 2 in. Switch Box, Gangable, 3-1/2 in. Deep, Seven 1/2 in. KO's & Nm Clamps, TS Bracket
ANT603	3 in. x 2 in. Switch Box, Gangable, 3-1/2 in. Deep, Seven 1/2 in. KO's & BX/MC NM Clamps, TS Bracket
ANT560	3 in. x 2 in. Switch Box, Gangable, 2-3/4 in. Deep, Eight 1/2 in. KO'S, Plaster Ears



ANT500



ANT501



ANT502




ANT503



ANT504



ANT505



ANT518



ANT519




ANT590



ANT591




ANT592




ANT600




ANT601



ANT603



ANT604



ANT605



ANT560





## 1.1.2-4 in. x 2 in. Handy Box

No.	Description
ANT650	4 in. x 2 in. Handy Box, 1-1/2 in. Deep, 11.5 Cu. In., Welded, Eleven 1/2 in. KO's
ANT660	4 in. x 2 in. Handy Box, 1-7/8 in. Deep, 13.0 Cu. In., Drawn, Twelve 1/2 in. KO's
ANT661	4 in. x 2 in. Handy Box, 1-7/8 in. Deep, 13.0 Cu. In., Drawn, Seven 1/2 in. KO's
ANT662	4 in. x 2 in. Handy Box, 1-7/8 in. Deep, 13.0 Cu. In., Drawn, Eight 3/4 in. KO KO
ANT683	4 in. x 2 in. Handy Box, 1-7/8 in. Deep, 16.5 Cu. In., Drawn, Eight 1/2 in. KO's



No.	Description
ANT125	4 in. Octagon Box, 4 in. x 1-1/2 in. Deep, 15.5 Cu. In., Nine 1/2 in. KO's, Drawn
ANT126	4 in. Octagon Box, 4 in. x 1-1/2 in. Deep, 15.5 Cu. In., Two 1/2 & Six 3/4 in. KO's, Drawn
ANT153	4 in. Octagon Box, 4 in. x 1-1/2 in. Deep, 15.5 Cu. In., Four 1/2 & Four 3/4 in. KO's, Drawn
ANT155	4 in. Octagon Box, 4 in. x 1-1/2 in. Deep, 15.5 Cu. In., Three 1/2 in. KO's & Clamps, Drawn
ANT164	4 in. Octagon Box, 4 in. x 1-1/2 in. Deep, 15.5 Cu. In., Two 1/2 & NM/SC Clamps, TS Bracket
ANT616	4 in. Octagon Box, 4 in. x 2-1/8 in. Deep, 21.5 Cu. In., Two 1/2 & KO's & Clamps, TS Bracket
ANT625	4 in. Octagon Box, 4 in. x 2-1/8 in. Deep, 21.5 Cu. In., Two 1/2 & NM/SC Clamps, Bar Hanger
ANT666	4 in. Octagon Box, Heavy Duty, Six Knockouts, 1/2" Knockout, Knockout/Top.Cable Entry; #14" 2m,
ANT935	4 in. Octagon Box, Drawn, 1-1/2 in. Deep, Two 1/2 in. KO's & JVC lamps, Drawn
ANT936	Celling Fan Box with Bar Hanger without clamps 1-1/2" Deep
AN7835	Celling Fan Box, AC/MC/Flex Clamps, Bar Hanger

ANT125	4 in. Octagon Box, 4 in. x 1-1/2 in. Deep, 15.5 Cu. In., Nine 1/2 in. KO's, Drawn
ANT126	4 in. Octagon Box, 4 in. x 1-1/2 in. Deep, 15.5 Cu. In., Two 1/2 & Six 3/4 in. KO's, Drawn
ANT153	4 in. Octagon Box, 4 in. x 1-1/2 in. Deep, 15.5 Cu. In., Four 1/2 & Four 3/4 in. KO's, Drawn
ANT155	4 in. Octagon Box, 4 in. x 1-1/2 in. Deep, 15.5 Cu. In., Three 1/2 in. KO's & Clamps, Drawn
ANT164	4 in. Octagon Box, 4 in. x 1-1/2 in. Deep, 15.5 Cu. In., Two 1/2 & NM/SC Clamps, TS Bracket



ANT125



ANT126



ANT127



ANT153



ANT155



ANT161



ANT164



ANT165



ANT166



ANT167



ANT324



ANT325



ANT326



ANT925



ANT4200



ANT5500



ANT130



ANT5501



ANT935



ANT5500



## 1.1.4-Square Box

No.	Description
ANT152	4 in. Square Box, Welded, 1-1/2 in. Deep with AC/MC/Flex Clamps, Three 1/2 in. KO's and One TKO, UBS, B Bracket
ANT181	4 in. Square Box, Welded, 1-1/2 in. Deep with One 1/2 and Twelve 3/4 in. KO's
ANT189	4 in. Square Box, Welded, 1-1/2 in. Deep with Ten 1/2 in. KO and Six TKO's, Raised Ground
ANT190	4 in. Square Box, Drawn, 1-1/2 in. Deep with Sixteen 1/2 in. KO's, Raised Ground
ANT193	4 in. Square Box, Drawn, 1-1/2 in. Deep with Ten 1/2 in. and Six 3/4 in. KO's, Raised Ground
ANT138	4 in. Square Box, Welded, 1-1/2 in. Deep with Eight 1/2 in. KO's and Five TKO's, Flush, B Bracket
ANT196	4 in. Square Box, Welded, 1-1/2 in. Deep with Eight 1/2 in. KO's and Five TKO's, FM, Flush Bracket
ANT197	4 in. Square Box, Welded, 1-1/2 in. Deep with Nine 1/2 in. KO's and Five TKO's, FH, Flush Bracket
ANT119	4 in. Square Box, Welded, 1-1/2 in. Deep with Clamps, Five 1/2 in. KO's and Two TKO's
ANT218	4 in. Square Box, Welded, 1-1/2 in. Deep with Clamps, Three 1/2 in. KO's and One TKO, FM Bracket
ANT322	4 in. Square Box, Welded, 2-1/8 in. Deep, Two 3/4 in., Two 1/2 in. and Eight 1 in. KO's
ANT233	4 in. Square Box, Welded, 2-1/8 in. Deep, Nine 1/2 in. KO's and Twelve TKO's, TS Bracket, Flush
ANT236	4 in. Square Box, Welded, 2-1/8 in. Deep with NMSC Clamps, Three 1/2 in. KO's and One TKO, TS Bracket
ANT240	4 in. Square Box, Welded, 2-1/8 in. Deep with AC/MC/Flex Clamps, Three 1/2 in. KO's and One TKO, TS Bracket
ANT244	4 in. Square Box, Welded, 2-1/8 in. Deep with Fifteen 1/2 in KO's
ANT239	4 in. Square Box, Drawn, 1-1/2 in Deep Extension with Eight 1/2 in KO's & Four 3/4 in KO's, B Bracket
ANT257	4-11/16" Square Box, Welded 2-1/8" Deep with Fourteen TKO, Two 1/2 in KO's



ANT152



ANT181



ANT189




ANT190



ANT192




ANT193




ANT196



ANT197



ANT213



ANT218



ANT232



ANT233



ANT235



ANT236



ANT240



ANT241



ANT249



ANT185



ANT203



ANT180



ANT257

## 1.1.5-Others

No.	Description
ANT952	3-Gang Box, Welded, 1-5/8 in. Deep, Fourteen 1/2 & 3/4 in. Concentric KO's, Six 1/2 in. KO's, and Four 3/4
ANT953	4-Gang Box, Welded, 1-5/8 in. Deep, Sixteen 1/2 & 3/4 in. Concentric KO's, Six 1/2 in. KO's, and Four 3/4 in.
ANT293	4 in Round Ceiling Pan, Drawn, 1/2 in Deep, Five 1/2 in KO's, 6.0 Cu.In. Nmcs Clamps
ANT942	3-Gang Multi Gang Box, Welded, 2-1/2 in. Deep, Fourteen 1/2 & 3/4 in. Concentric KO's. Six 1/2 in. ', and Four 3/4
ANT942	4-Gang Multi Gang Box, Welded, 2-1/8 in. Deep, Nine 1/2 in. KO's and Twelve TKO's, TS Bracket, Flush
ANT943	3-Gang Multi Gang Box, Welded, 2-1/8 in. Deep with NMSC Clamps, Three 1/2 in. KO's and One TKO, TS Bracket
ANT944	5-Gang Multi Gang Box, Welded, 2-1/8 in. Deep with AC/MC/Flex Clamps, Three 1/2 in. KO's and One 3/4 in KO's



ANT952



ANT953



ANT293



ANT942



ANT943



ANT944

### 1.2 Metal Covers, Brackets, Hangers

No.	Description
ANT777	4 in. Square Cover, 2-Device, 1/4 in. Raised
ANT823	4-Gang Box Device Cover, Raised 3/4 in., 10-11/16 in. Width
ANTUN-05	Adjustable Mud Ring Square Cover, 1-Gang, 5/8 in-1-1/4 in
ANTUN-06	Adjustable Mud Ring Square Cover, 2-Gang, 5/8 in-1-1/2 in
ANTUN-08	4-11/16 in. Adjustable Mud Ring, 1-Gang, Depth from 3/8" to 1-1/4"
ANTUN-09	4-11/16 in. Adjustable Mud Ring, 2-Gang, Depth from 3/8" to 1-1/4"
ANT837	4-11/16 in. Square Cover, 1-Gang, 1/2" raised
ANT841	4-11/16 in. Square Cover, 2-Gang, 1/2" raised
ANT812	4-11/16 in. Square Cover, 3-Gang
ANTUN-13	Square Cover, 4-11/16", Natural, Raied surface, one device, Steel, 1-1/2" raised
ANT829	4-11/16" Square Round Fixture Ring - Raised 1/2", Open, Ears 2-3/4" O.c
ANTUN-15	4 in. Square Cover, 1-Device, 1-1/4 in. Raised
ANTUN-25	Square Mud Ring, 4", Steel, 3/4" to 5/8" raised, One Device, Steel, 1-1/2" raised
ANT800	Square Surface Cover, 4", Raised Surface, Steel, For one toggle switch, 7.0 Cu.In
ANTUN-35	Electrical Box Attachment, Mounts to TSGB, Steel
ANT365	4 in Square Round Ring 3/4 in-1-1/2 in. Raised



### 1.3 Metal Box Covers

No.	Size	Description	Photo
ANT 20-C-1	4"X2-1/8"	Material:Galvanized Steel, Utility Boxes Cover,For duplex receptacle,20 Series	
ANT 20-C-4	4"X2-1/8"	Material:Galvanized Steel, Utility Boxes Cover, Blank, 20 Series	
ANT 20-C-5	4"X2-1/8"	Material:Galvanized Steel, Utility Boxes Cover, For toggle switch, 20 Series	
ANT 52-C-0	4"*4"	Material:Galvanized Steel, 4" Square Single Device Covers,Flat	
ANT 52-C-00	4"X4"	Material:Galvanized Steel, 4" Square Two Device Covers,Flat.	
ANT 52-C-1	4"X4"	Material:Galvanized Steel, 4" Square Flat Covers,Blank	
ANT 52-C-3	4"X4", Raised 1/2"	Material:Galvanized Steel, 4" Square Plaster Ring Cover,Raised 1/2". (3.4 cu. in.) Tapped ears on 2-3/4" centers.	

NEWTONELECTRIQ



NEW TONE ELECTRIC

No.	Size	Capacity	Description	Photo
ANT MB-24	Support Bracket	24"	Material:Galvanized Steel, Support Bracket for 24" Stud Spacing, Metallic	
ANT BB7-16	open box mount bracket flyer	16"	Material:Galvanized Steel, Stud Spacing Open Box Mount bracket	
ANT BB7-24	open box mount bracket flyer	24"	Material:Galvanized Steel, Stud Spacing Open Box Mount bracket	
ANT MP4-2	4 New Construction Mounting Plate		Material:Galvanized Steel, 4 New Construction LED Recessed Lighting Kits Bracket	
ANT SGB-16	Telescoping Screw Gun Box Bracket 16		Material:Galvanized Steel, Telescoping Screw Gun Box Bracket, 11"-18" Stud Space	
ANT SGB-24	Telescoping Screw Gun Box Bracket 24		Material:Galvanized Steel, Telescoping Screw Gun Box Bracket, 17"-26" Stud Space	
ANT TCB	STUD SPACING 16-24		Material:Galvanized Steel, Telescoping Ceiling Bracket, Stud Spacing 16-24"	
ANT 1041	Adjustable from 11-1/2" to 18-1/2".		Material:Galvanized Steel, Bar Hangers, Adjustable from 11-1/2" to 18-1/2", Maximum load capacity: 50 lb. (22.7).	

No.	Size	Description	Photo
ANT-RP	4"&6" Flat Rough-In Plates	Material:Galvanized Steel 4" 6" New Construction Plate Recessed Lighting Easy Installation Flat Rough-in Plate	
ANT-P4010	4"	Material:Galvanized Steel Rough In Mounting Plate Without Lip New Construction Bracket For 4 Inch Led Recessed Lights	
ANT-P4000	4"	Material:Galvanized Steel Rough In Mounting Plate With Lip New Construction Bracket For 4 Inch Led Recessed Lights	
ANT BHT1HD	24"	Material:Galvanized Steel, Electrical Box Support 512 HD	
ANT 812MB18A	18-30(OD)	Material:Galvanized Steel, Combination Box or Conduit Hanger	
ANT 18ADJ	18"	Material:Galvanized Steel,ADJ Bracket	

## 1.4 Electrical Plastic Boxes

### 1.4.1-Electrical Plastic Boxes

ANTSN18X	1-Gang New Work Switch/ Outlet Nail-On Box, 18 Cu, Non-Metallic
ANTSN20X	1-Gang New Work Switch/ Outlet Nail-On Box, 20 Cu, Non-Metallic
ANTSN22X	1-Gang New Work Switch/ Outlet Nail-On Box, 22 Cu, Non-Metallic

# Product Information



Website: [newtonelectriq.com](http://newtonelectriq.com)



Contact: +1 (305) 902-1459

NEW TONE ELECTRIQ

No.	Size	Description	Photo
ANT 52-C-18	4"X4", Raised 3/4"	Material:Galvanized Steel, 4" Square Two Device Covers, Raised 3/4". (10.3 cu. in.)	
ANT 54-C-1	4"X4"	Material:Galvanized Steel, 4" Round Covers,Flat blank.	
ANT 54-C-6	4"X4" with 1/2" ko	Material:Galvanized Steel, 4" Round Covers, Flat with 1/2" conduit knockout.	
ANT 72-C-1	4-11/16" Sq	Material:Galvanized Steel, 4-11/16" Flat Covers,Blank.	
ANT 72-C-6	4-11/16" Sq	Material:Galvanized Steel, 4-11/16" Flat Covers,With concentric 1/2" and 3/4" conduit knockout.	
ANT 1320	"CUT-IN" Drywall Bracket	Material:Galvanized Steel, 1-gang Low Voltage Drywall Bracket, with Screws	
ANT 54-COV-1	5" Round Covers (White Enamel Paint) Flat blank. Mounting screws included.	Material:Steel, 5" Round Covers (White Enamel Paint),Flat blank. Mounting screws included.	

No.	Size	Capacity	Description	Photo
ANT 66	1-3/8"*3"		Material:Galvanized Steel, Cable Protector Plates	
ANT 66-SS	4-3/8"*1-7/8"		Material:Galvanized Steel, Cable Protector Plates	
ANT 66-XL	4-1/4"*3-3/4"		Material:Galvanized Steel, Cable Protector Plates	
ANT 99PP	2-9/16 in. Cable Protector		Material:Galvanized Steel, Cable Protector Plates	
ANT TZTSGB16	Telescoping Screw Gun Box Support Bracket 11-1/2 - 17-3/4		Material:Galvanized Steel, Telescoping Screw Gun Box Support Bracket 11-1/2 - 17-3/4	
ANT CJ6	Cable Support		Material:Galvanized Steel, Stud Mounting Cable Support With Locking Tab	
ANT BS-6	Box Mounting Bracket For Standard Device Rings - 2-1/2" Through 6" Farside Standoff		Material:Galvanized Steel, Electrical box bracket to stud, 2 1/2", 3 5/8" wall depth, 3.51"	
ANT MB-16	Support Bracket	16"	Material:Galvanized Steel, Support Bracket for 16" Stud Spacing, Metallic	



No.	Description
ANTSN32X	2-Gang New Work Switch/ Outlet Nail-On Box, 32 Cu, Non-Metallic 32Cu.In with nails
ANTSN44X	3-Gang New Work Switch/ Outlet Nail-On Box, 44 Cu, Non-Metallic 44Cu.In with nails
ANTSN60X	4-Gang New Work Switch/ Outlet Nail-On Box, 60 Cu, Non-Metallic 60Cu.In with nails
ANTSNB44X2	2-Gang New Work Switch/ Outlet Nail-On Box, 44 Cu, Non-Metallic 44Cu.In with nails
ANTSNB68X3	3-Gang New Work Switch/ Outlet Nail-On Box, 68 Cu, Non-Metallic 68Cu.In with nails
ANTSNB87X4	4-Gang New Work Switch/ Outlet Nail-On Box, 87 Cu, Non-Metallic 87Cu.In with nails
ANTSN64HX	4-Gang New Work Switch/ Outlet Nail-On Box, 69 Cu, Non-Metallic 69Cu.In with nails
ANTSN53HX	3-Gang New Work Switch/ Outlet Nail-On Box, 52 Cu, Non-Metallic 52Cu.In with nails
ANTSN21X-ADJ	1-Gang New Work Switch/ Outlet Nail-On Box, 21 Cu, Non-Metallic With Adjustable Bracket
ANTSN34X-ADJ	2-Gang New Work Switch/ Outlet Nail-On Box, 34 Cu, Non-Metallic With Adjustable Bracket



## 1.4.2-Old Work Boxes

No.	Description
ANTSN14Z	1-Gang Old Work Switch/ Outlet Box, 14 Cu, Non-Metallic
ANTSN20Z	1-Gang Old Work Switch/ Outlet Box, 20 Cu, Non-Metallic
ANTSN25Z	2-Gang Old Work Switch/ Outlet Box, 25 Cu, Non-Metallic 25Cu.In
ANTSN18HZ	1-Gang Old Work Switch/ Outlet Box, 18 Cu, Non-Metallic
ANTSN18S	1-Gang Old Work Switch/ Outlet Box, 8 Cu, Non-Metallic



ANTSN14Z



ANTSN20Z



ANTSN25Z



ANTSN18HZ



ANTSN18S

## 1.4.3-Ceiling Boxes

No.	Description
ANTSN18RC	1-Gang Old Work Nail-On Ceiling Box, 18 Cu.In, Non-Metallic
ANTSN20WC	1-Gang Ceiling Box With Hanger, 20 Cu.In, Non-Metallic
ANTSN20XC	1-Gang New Work Nail-On Ceiling Box, 20.3 Cu.In, Non-Metallic
ANTSN25HXCG	1-Gang New Work Nail-On Ceiling Box, 24.8 Cu.In, Non-Metallic



ANTS18RC



ANTSN20WC



ANTSN20XC



ANT25HXCG

## 1.4.4-Non-Metallic Concrete Wall Boxes

No.	Description
SLA-17101	4X3/4 In. PVC Slab Box Grey With Molded Connectors, 15 Cu.In 245ml, 4-Inlet, 1-Outlet
SLA-17102	4x1/2 In. PVC Slab Box Grey With Molded Connectors, 15 Cu.In 245ml, 4-Inlet, 1-Outlet
SLB-18101	4X1/2 In. 4X3/4 In. PVC Slab Box Grey With Molded Connectors, 44Cu.In 721ml, 8-Inlet, 1-Outlet
SLB-18102	4X1 In. 4X3/4 In. PVC Slab Box Grey With Molded Connectors, 44Cu.In 721ml, 8-Inlet, 1-Outlet
SLB-18104	8X1/2 In. PVC Slab Box Grey With Molded Connectors, 44Cu.In 721ml, 8-Inlet, 1-Outlet
SLB-18105	8X3/4 In. PVC Slab Box Grey With Molded Connectors, 44Cu.In 721ml, 8-Inlet, 1-Outlet

No.	Description
SLC--19101	4X1/2 In. 4X3/4 In PVC Slab Box Grey With Molded Connectors, 44Cu.In 721ml, 8-Inlet, 1-Outlet
SLC-19102	4X1 In. 4X3/4 In. PVC Slab Box Grey With Molded Connectors, 44Cu.In 721ml, 8-Inlet, 1-Outlet
SLC-19104	8X1/2 In. PVC Slab Box Grey With Molded Connectors, 44Cu.In 721ml, 8-Inlet, 1-Outlet
SLC-19105	8X3/4 In. PVC Slab Box Grey With Molded Connectors, 44Cu.In 721ml, 8-Inlet, 1-Outlet
SLD-20101	4X1/2 In. 4X3/4 In. PVC Slab Box Grey With Molded Connectors, 44Cu.In 721ml, 1-Outlet
SLD-20102	4X1 1 In. 4X3/4 In. PVC Slab Box Grey With Molded Connectors, 44Cu.In 721ml, 1-Outlet
SLD-20104	8X1/2 In. PVC Slab Box Grey With Molded Connectors, 44Cu.In 721ml, 8-Inlet, 1-Outlet
SLD-20105	8X3/4 In. PVC Slab Box Grey With Molded Connectors, 44Cu.In 721ml, 8-Inlet, 1-Outlet
SLE-1	4X1/2 In. 4X3/4 In. Concrete Wall Boxes 100cu.in 1600ml, 1-Outlet
SLF-1	Concrete Wall Boxes 61Cu.In 1000ml



## 1.4.6-PVC Gang Box

No.	Description
ANTFS1G	Type FSC Single Gang Box, 21.0 cu.in. surface mount box, PVC
ANTFS2G	Type FSC Two Gang Box, 36.0 cu.in. surface mount box, PVC
ANTFE1G	Type FSE Single Gang Box, 22.5 cu.in. surface mount box, PVC
ANTFSS1G	Type FSS Single Gang Box, 21.8 cu.in. surface mount box, PVC



## 1.4.7-PVC Waterproof Junction Box

No.	Description
ANTPQ442	4"x4"x2" PVC Waterproof Junction Box
ANTPQ444	4"x4"x4" PVC Waterproof Junction Box
ANTPQ664	6"x6"x4" PVC Waterproof Junction Box
ANTPQ884	8"x8"x4" PVC Waterproof Junction Box
ANTPQ12126	12"x12"x6" PVC Waterproof Junction Box
ANTRJB075	1/2 in. and 3/4 in. socket outlets Round Junction Box .Includes cover, gasket, and screws



## 1.4.5-Non-Metallic Box Extender

No.	Description
SLK-1	1-Gang, 1-1/2 In Deep, Box Extender White, 1.5 In
SLK-2	2-Gang, 1-1/2 In Deep, Box Extender White, 1.5 In
SLK-3	3-Gang, 1-1/2 In Deep, Box Extender White, 1.5 In
SLK-4	4-Gang, 1-1/2 In Deep, Box Extender White, 1.5 In
SLK-5	1-Gang, 1-1/2 In Deep, Ceiling Box Extender White, 1.5 In



1.4.8 Plastic Covers and Brackets

No.	Description
ANTDG-1	Blank White Round Ceiling Box Cover
ANTGDJ-1	1-Gang Low Voltage Mounting Bracket
ANTGDJ-2	2-Gang Low Voltage Mounting Bracket
ANTGDJ-3	3-Gang Low Voltage Mounting Bracket
ANTGDJ-4	4-Gang Low Voltage Mounting Bracket
ANTSLG-1	1-Gang Low Voltage Nail-On Mounting Bracket
ANTSLG-2	2-Gang Low Voltage Nail-On Mounting Bracket
ANTSLG-3	3-Gang Low Voltage Nail-On Mounting Bracket
ANTSLG-4	4-Gang Low Voltage Nail-On Mounting Bracket



## 2 Conduits, Pipes, Fittings and Other Accessories

The following content shows you the information of our conduits, wires, fittings and other products, including but not limited to Metallic conduits and fittings, PVC conduits and fittings, sockets & wall plates, wire connectors, cable wire & other accessories. All these products are for the universal market, some of them could be manufactured under local standards (UL ETL etc.)



## 2.1 EMT Conduits and Fittings

### 2.1.1-Conduits

**Galvanized Steel Flexible Metal Conduit**

Electrical conduit made from a mixture of iron and zinc, with a protective coating of galvanisation.

PHOTO	ITEM NO.	SIZE
	ANT-G50	1/2"
	ANT-G75	3/4"
	ANT-G100	1"
	ANT-G125	1-1/4"
	ANT-G150	1-1/2"
	ANT-G200	2"

**Unistrut Channel**

Mechanical support systems that provide a rigid structural system for electrical cables

PHOTO	ITEM NO.	SIZE
	ANT-CT4120	41X41X2.0mm
	ANT-CT2120	41X21X2.0mm
	ANT-CT4125	41X41X2.5mm
	ANT-CT2125	41X21X2.5mm

**Liquid Tight Steel Flexible Conduit**

Inner layer is galvanized steel strip, and the outer layer is plasticized with PVC

PHOTO	ITEM NO.	SIZE
	ANT-LFC38	3/8"
	ANT-LFC50	1/2"
	ANT-LFC75	3/4"
	ANT-LFC100	1"
	ANT-LFC125	1-1/4"
	ANT-LFC150	1-1/2"
	ANT-LFC200	2"
	ANT-LFC250	2-1/2"
	ANT-LFC300	3"
	ANT-LFC400	4"

**HDG Galvanized Steel EMT Conduit UI797 Standard**

EMT conduit is a type of electrical conduit used for the protection and routing of electrical wires and cables.

PHOTO	ITEM NO.	SIZE
	ANT-ESC50	1/2"
	ANT-ESC75	3/4"
	ANT-ESC100	1"
	ANT-ESC125	1-1/4"
	ANT-ESC150	1-1/2"
	ANT-ESC200	2"
	ANT-ESC250	2-1/2"
	ANT-ESC300	3"
	ANT-ESC350	3-1/2"
	ANT-ESC400	4"

### Rigid Aluminum Conduit Weights and Specifications (10' Lengths)

Applicable tolerances:length:10Ft±1/4"

Outside diameter: 1/2"-2"±0.015";2 1/2"-4"±0.0025";5"-6"±1%

Dimensions data is for reference only NPT thread with end-cap on each end Rigid Aluminum Yard Elbows meet UL6A

PHOTO	Trade Size	Nominal Wt. Per 100 Ft. With Couplings		Nominal Outside Diameter		Nominal Wall Thickness		End cap color	Qty. in Master Bundle	Volume per Master Bundle	Nom. Wt. per Master Bundle
	Inches	lb.	Kg	In.	mm	In.	mm				
	1/2"	28.1	12.7	0.84	21.3	0.104	2.64	Black	250	0.53	319
	3/4"	37.4	17	1.05	26.7	0.107	2.72	Red	250	0.77	424
	1"	54.5	24.7	1.315	33.4	0.126	3.2	Black	200	0.88	494
	1 1/4"	71.6	32.5	1.66	42.2	0.133	3.38	Red	100	0.78	325
	1 1/2"	88.7	40.2	1.9	48.3	0.138	3.51	Black	100	0.97	402
	2"	118.5	53.8	2.375	60.3	0.146	3.71	Blue	45	0.75	242
	2 1/2"	187.5	85	2.875	73	0.193	4.9	Black	30	0.65	255
	3"	246.3	111.7	3.5	88.9	0.205	5.21	Blue	20	0.65	223
	3 1/2"	295.6	134.1	4	101.6	0.215	5.46	Black	20	0.78	268
	4"	350.2	155.8	4.5	114.3	0.225	5.72	Blue	20	1	318
	5"	478.9	217.2	5.563	141.3	0.245	6.22	Blue	8	0.69	174
	6"	630.4	285.9	6.625	168.3	0.265	6.76	Blue	6	0.76	172

### 2.1.2-Metal clamps

**Conduit Steel Strut Clamp Metal Tube Clamp**

Rigid Conduit Clamps For Strut Steel

PHOTO	ITEM NO.	SIZE
	ANT -050	1/2"
	ANT -075	3/4"
	ANT -100	1"
	ANT 125	1-1/4"
	ANT -150	1-1/2"
	ANT -200	2"

**Strut Straps (pipe clamps) for EMT/IMC/RIGID**

Designed to fit Both Pipe (Rigid Conduit) and Thin Walled Tubing (EMT) in Various Sizes  
Standard AS (Anti-salt fog treatment) Finish

PHOTO	ITEM NO.	SIZE
	ANT-SCU50	1/2"
	ANT-SCU75	3/4"
	ANT-SCU100	1"
	ANT-SCU125	1-1/4"
	ANT-SCU150	1-1/2"
	ANT-SCU200	2"
	ANT-SCU250	2-1/2"
	ANT-SCU300	3"
	ANT-SCU400	4"

**Strut Channel Spring Nut**

Material: Steel With Zinc Plated;

PHOTO	ITEM NO.	SIZE
	ANT-225	Various sizes available, including metric (M6, M8, M10, M12) and imperial (1/4", 5/16", 3/8", 1/2")



## Thread Type Entrance Cap (Aluminum die)

Aluminum EMT inlet cap/head electrical threaded conduit fittings

PHOTO	ITEM NO.	SIZE
	ANT-840	1/2"
	ANT-841	3/4"
	ANT-842	1"
	ANT-843	1-1/4"
	ANT-844	1-1/2"
	ANT-845	2"

## Clamp Type Entrance Cap (Aluminum die)

Aluminum Clamp-on Type Service Entrance Cap Conduit Fittings

PHOTO	ITEM NO.	SIZE
	ANT-830	1/2"
	ANT-831	3/4"
	ANT-832	1"
	ANT-833	1-1/4"
	ANT-834	1-1/2"
	ANT-835	2"

## Couduit Body LB (Aluminum die)

Used in electrical devices where the direction of conduits needs to be changed, especially at right angles

PHOTO	ITEM NO.	SIZE
	ANT-LB50	1/2"
	ANT-LB51	3/4"
	ANT-LB52	1"
	ANT-LB53	1-1/4"
	ANT-LB54	1-1/2"
	ANT-LB55	2"
	ANT-LB56	2-1/2"
	ANT-LB57	3"
	ANT-LB58	3-1/2"
	ANT-LB59	4"

## Couduit Body & WP Box "T" (Aluminum die)

Designed to provide T-joints or conduit access points for wire pulling and maintenance.

PHOTO	ITEM NO.	SIZE
	ANT-T50	1/2"
	ANT-T51	3/4"
	ANT-T52	1"
	ANT-T53	1-1/4"
	ANT-T54	1-1/2"
	ANT-T55	2"
	ANT-T56	2-1/2"
	ANT-T57	3"
	ANT-T58	3-1/2"
	ANT-T59	4"

## Aluminum Singe Gang Weatherproof Outlet Box

Ona-gang outlet boxes are used as a weatherproof junction box or housing for a single electrical device in wet, damp or dry locations. \*SE indicates side entry knockcuts \*Material: Metal Die-Cast

PHOTO	ITEM NO.	Knockouts	Volume Cu.In
	ANT-14250	(3holes)1/2" threaded hole	18.3
	ANT-14251	(4holes)1/2" threaded hole	18.3
	ANT-14251-5	(5holes)1/2" threaded hole	18.3
	ANT-14251-5X	(5holes)1/2" threaded hole(SE)	18.3
	ANT-14252	(3holes)3/4" threaded hole	18.3
	ANT-14252-5X	(5holes)3/4" threaded hole(SE)	18
	ANT-14253	(4holes)3/4" threaded hole	18.3
	ANT-14253-5	(5holes)3/4" threaded hole	18.3
	ANT-14255	(3holes)1/2" threaded hole	25.5
	ANT-14256	(3holes)3/4" threaded hole	25.5
ANT-14257	(3holes)1" threaded hole	23	

## Aluminum Two Gang Weatherproof Outlet Box

Two-gang outlet boxes are used as a weatherproof junction box or as a housing for up to two electrical devices in wet, damp or dry locations. \*SE indicates side entry knockouts \*Material: Metal Die-Cast

PHOTO	ITEM NO.	Knockouts	Volume Cu.In
	ANT-14350	(3holes)1/2" threaded hole	31
	ANT-14351	(4holes)1/2" threaded hole	31
	ANT-14351-5	(5holes)1/2" threaded hole	31
	ANT-14351-7	(7holes)1/2" threaded hole	30.3
	ANT-14352	(3holes)3/4" threaded hole	31
	ANT-14353	(4holes)3/4" threaded hole	31
	ANT-14353-5	(5holes)3/4" threaded hole	31
	ANT-14353-5X	(5holes)3/4" threaded hole(SE)	31
	ANT-14352-7	(7holes)3/4" threaded hole	30.3
	ANT-14357	(3holes)1" threaded hole	31

## Aluminum Round Weatherproof Box

Aluminum Die Cast Round Weatherproof Box

PHOTO	ITEM NO.	Trade Size	Shelf QTY	Master QTY	Width(inch)	Length(inch)	Max.Capacity
	ANT RB-51	1/2"X5	1	60	4.185	5.492	1.58cu in/ 259ml
	ANT RB-52	3/4"X5	1	60	4.185	5.492	1.58cu in/ 260ml

## Air Conditioning Disconnects

Used to disconnect power from AC units, promote safe working conditions and prevent electrical hazards.

PHOTO	ITEM NO.	Amp Rating
	PDS-60AN	60A
	PDS-60A	60A
	PDS-30A	30A

## Non-Metallic Air Conditioning Disconnect

Used to disconnect power from AC units, promote safe working conditions and prevent electrical hazards.

PHOTO	ITEMNO.	SIZE
	ANT-PCDS-60AN	60A

## Non-Fusible Disconnect Switch

Non-fused 60 Amp surge protected disconnect is a complete assembly that allows for a quick and easy solution for HVACR equipment protection.

PHOTO	ITEM NO.	Amp Rating
	ANT-S60AN	60A

## GFCI Rainproof 3R Enclosure

Outdoor Outlet Box, 20 AMP WRTR GFCI Receptacle, Rainproof 3R Enclosure, Weatherproof All Metal Electrical Outlet Cover, Power Plug for Halloween Decorations, Patio Lights, ETL Listed

PHOTO	ITEM NO.	SIZE
	ANT 5-20R2GFCI	7-1/8 in. (H) x 5-3/4 in. (W) x 5-3/16 in. (D).



## INNER BOX

Power outlet panel 30A with 30A circuit breaker.  
NEMA TT-30R, Rated 30A, 125V.  
3R protection enclosure

PHOTO	ITEM NO.	Q'TY	SIZE	G/W
	ANT-OB30C	1	7.68x7.09x13.19inch (19.5x18x33.5cm)	7.92LBS (3.6 KG)

## INNER BOX

Power outlet panel 50A with 50A circuit breaker.  
NEMA 14-50R, Rated 50A, 125/250V.  
3R protection enclosure

PHOTO	ITEM NO.	Q'TY	SIZE	G/W
	ANT-OB50C	1	7.68x7.09x13.19inch (19.5x18x33.5cm)	8.36LBS (3.8 KG)

## INNER BOX

Power outlet panel 30A+20A TR GFCI with 30A+20A circuit breaker.  
NEMA TT-30R+5-20R GFCI receptacle.  
3R protection enclosure

PHOTO	ITEM NO.	Q'TY	SIZE	G/W
	ANT-OB2030C	1	7.68x7.09x13.19inch (19.5x18x33.5cm)	8.36LBS (3.8 KG)

## INNER BOX

Power outlet panel 50A+20A TR GFCI with 50A+20A circuit breaker.  
NEMA 14-50R+5-20R GFCI receptacle.  
3R protection enclosure

PHOTO	ITEM NO.	Q'TY	SIZE	G/W
	ANT-OB2050C	1	7.68x7.09x13.19inch (19.5x18x33.5cm)	7.92LBS (3.6 KG)

## INNER BOX

Power outlet panel 30A+50A with 30A+50A circuit breaker.  
NEMA TT-30R+NEMA 14-50R.  
3R protection enclosure.

PHOTO	ITEM NO.	Q'TY	SIZE	G/W
	ANT-OB3050C	1	10.63x7.68x13.19inch (27x19.5x33.5cm)	11.22LBS (5.1 KG)

## INNER BOX

Power outlet panel 50A+30A+20A TR GFCI with 50A+30A+20A circuit breaker.  
NEMA TT-30R+NEMA 14-50R+5-20R GFCI receptacle.  
3R protection enclosure

PHOTO	ITEM NO.	Q'TY	SIZE	G/W
	ANT-OB235C	1	10.63x7.68x13.19inch (27x19.5x33.5cm)	11.66LBS (5.3 KG)

## Inner Box

NEMA TT-30R, Rated 30A, 125V Power Outlet Box.  
Enough space for wiring and plugging in 30A RV cord.

PHOTO	ITEM NO.	Q'TY	SIZE	G/W
	RM30DFPB-22	1	15.4x11.8x4.7inch (39x30x12cm)	5.51LBS (2.5KGS)

## Inner Box

NEMA 14-50R, Rated 50A, 125/250V Power Outlet Box.  
Enough space for wiring and plugging in 50A RV cord.

PHOTO	ITEM NO.	Q'TY	SIZE	G/W
	RM50DFPB-22	1	16.5x12.6x5.3inch (42x32x13.5cm)	9.92LBS (4.5KGS)

NEWTONELECTRIQ



**Inner Box**

NEMA 6-30R, Rated 30A, 250V Power Outlet Box.  
Enough space for wiring and plugging in 30A cord.

PHOTO	ITEM NO.	Q'TY	SIZE	G/W
	RM630PB-22	1	12.5x5.7x4.4inch (31.8x14.5x11.1cm)	6.88LBS (3.12KGS)

**Inner Box**

NEMA 6-50R, Rated 50A, 250V Power Outlet Box.  
Enough space for wiring and plugging in 50A cord.

PHOTO	ITEM NO.	Q'TY	SIZE	G/W
	RM650PB-22	1	6.5x5.9x2inch (16.5x15x5cm)	0.73LBS (0.33KGS)

**2.1.3-Steel list**

**EMT Elbow - 45 Degree**

45 Degree Electro-Galvanized 100, Standard Length  
Allows for a directional change in a set of EMT conduit

PHOTO	ITEM NO.	SIZE
	ANT-EB50	1/2"
	ANT-EB75	3/4"
	ANT-EB100	1"
	ANT-EB125	1-1/4"
	ANT-EB150	1-1/2"
	ANT-EB200	2"

**IMC Elbow-Without Coupling (Pre-Galvanized)**

Used to redirect IMC conduits while providing protection and maintaining the integrity of the electrical wiring system

PHOTO	ITEM NO.	SIZE
	ANT-IEC50	1/2"
	ANT-IEC75	3/4"
	ANT-IEC100	1"
	ANT-IEC125	1-1/4"
	ANT-IEC150	1-1/2"
	ANT-IEC200	2"

**Rigid 45D Elbow**

Designed to provide a smooth and gradual bend in the conduit system

PHOTO	ITEM NO.	SIZE
	ANT-RD45 50	1/2"
	ANT-RD45 75	3/4"
	ANT-RD45 100	1"
	ANT-RD45 125	1-1/4"
	ANT-RD45 150	1-1/2"
	ANT-RD45 200	2"

**Rigid Conduit 90D Elbow**

Used to make a 90 degree directional change when installing rigid or intermediate metal conduit

PHOTO	ITEM NO.	SIZE
	ANT-DE50	1/2"
	ANT-DE75	3/4"
	ANT-DE100	1"
	ANT-DE125	1-1/4"
	ANT-DE150	1-1/2"
	ANT-DE200	2"

**EMT Connector, Steel Material**

Used to connect EMT conduit to electrical box or other metal enclosures by compression connection

PHOTO	ITEM NO.	SIZE
	ANT-ECO50	1/2"
	ANT-ECO75	3/4"
	ANT-ECO100	1"
	ANT-ECO125	1-1/4"
	ANT-ECO150	1-1/2"
	ANT-ECO200	2"
	ANT-ECO250	2-1/2"
	ANT-ECO300	3"
	ANT-ECO350	3-1/2"
	ANT-ECO400	4"

**EMT Coupling, Steel Material**

Connect & effectively bond EMT conduit to steel outlet boxes, load centers & other metal enclosures

PHOTO	ITEM NO.	SIZE
	ANT-ECS50	1/2"
	ANT-ECS75	3/4"
	ANT-ECS100	1"
	ANT-ECS125	1-1/4"
	ANT-ECS150	1-1/2"
	ANT-ECS200	2"
	ANT-ECS250	2-1/2"
	ANT-ECS300	3"
	ANT-ECS350	3-1/2"
	ANT-ECS400	4"

**EMT Compression Connector, Steel Material**

Internal thread, used to screw to the ends of two EMT conduits to form a tight and secure connection

PHOTO	ITEM NO.	SIZE
	ANT-ECT50	1/2"
	ANT-ECT75	3/4"
	ANT-ECT100	1"
	ANT-ECT125	1-1/4"
	ANT-ECT150	1-1/2"
	ANT-ECT200	2"
	ANT-ECT250	2-1/2"
	ANT-ECT300	3"
	ANT-ECT350	3-1/2"
	ANT-ECT400	4"

**EMT Compression Coupling, Steel Material**

Cylindrical, with internal threads, can be screwed to the ends of two EMT conduits, compressing them together to form a strong continuous conduit

PHOTO	ITEM NO.	SIZE
	ANT-ECC50	1/2"
	ANT-ECC75	3/4"
	ANT-ECC100	1"
	ANT-ECC125	1-1/4"
	ANT-ECC150	1-1/2"
	ANT-ECC200	2"
	ANT-ECC250	2-1/2"
	ANT-ECC300	3"
	ANT-ECC350	3-1/2"
	ANT-ECC400	4"

**Steel Beam Clamp**

Clamps used to attach and secure beams or structural members to support systems

PHOTO	ITEM NO.	SIZE
	ANT-SBC	1"

**65MN Steel Harden Darcromate Finished Beam Clamp**

A fixture for attaching and securing beams or structural members to a support system

PHOTO	ITEM NO.	SIZE
	ANT-SHD	1/4" and 3/8" threaded rod 1/4" -20 or #10-24 threaded halter ring



## IMC Conduit Coupling

Used to connect the electrical steel conduits together, thus extending the length of the conduit

PHOTO	ITEM NO.	SIZE
	ANT-ICC50	1/2"
	ANT-ICC75	3/4"
	ANT-ICC100	1"
	ANT-ICC125	1-1/4"
	ANT-ICC150	1-1/2"
	ANT-ICC200	2"
	ANT-ICC250	2-1/2"
	ANT-ICC300	3"
	ANT-ICC350	3-1/2"
	ANT-ICC400	4"

## Rigid Conduit Coupling

Used to connect two lengths of steel rigid conduit together, ensuring the continuity of the electrical conduit system.

PHOTO	ITEM NO.	SIZE
	ANT-RCC50	1/2"
	ANT-RCC75	3/4"
	ANT-RCC100	1"
	ANT-RCC125	1-1/4"
	ANT-RCC150	1-1/2"
	ANT-RCC200	2"
	ANT-RCC250	2-1/2"
	ANT-RCC300	3"
	ANT-RCC350	3-1/2"
	ANT-RCC400	4"
	ANT-RCC500	5"
ANT-RCC600	6"	

## Conduit Hanger, C/W Screws for EMT/IMC/RIGID Conduit Automatically Screw in

Hardware used to secure and support electrical piping in various installations

PHOTO	ITEM NO.	SIZE
	ANT-CH50	1/2"
	ANT-CH75	3/4"
	ANT-CH100	1"
	ANT-CH125	1-1/4"
	ANT-CH150	1-1/2"
	ANT-CH200	2"
	ANT-CH250	2-1/2"
	ANT-CH300	3"
	ANT-CH400	4"

## Strut Clamp, Come with Screws for EMT/IMC/RIGID

Fasteners for attaching electrical conduits to strut channels or metal frame systems

PHOTO	ITEM NO.	SIZE
	ANT-SC50	1/2"
	ANT-SC75	3/4"
	ANT-SC100	1"
	ANT-SC125	1-1/4"
	ANT-SC150	1-1/2"
	ANT-SC200	2"
	ANT-SC250	2-1/2"
	ANT-SC300	3"
	ANT-SC400	4"

## EMT One-hole Strap

Designed to attach EMT conduits to surfaces such as walls or ceilings.

PHOTO	ITEM NO.	SIZE
	ANT-EOS38	3/8"
	ANT-EOS50	1/2"
	ANT-EOS75	3/4"
	ANT-EOS100	1"
	ANT-EOS125	1-1/4"
	ANT-EOS150	1-1/2"
	ANT-EOS200	2"
	ANT-EOS250	2-1/2"
	ANT-EOS300	3"
	ANT-EOS350	3-1/2"
	ANT-EOS400	4"

## EMT Two-hole Strap

Used to secure EMT conduits to maintain the integrity of the electrical wiring system

PHOTO	ITEM NO.	SIZE
	ANT-ETS50	1/2"
	ANT-ETS75	3/4"
	ANT-ETS100	1"
	ANT-ETS125	1-1/4"
	ANT-ETS150	1-1/2"
	ANT-ETS200	2"
	ANT-ETS250	2-1/2"
	ANT-ETS300	3"
	ANT-ETS350	3-1/2"
	ANT-ETS400	4"

## Malleable Iron Beam Clamp

Making quick connections to structural steel without the need for drilling or welding. Used for a variety of support, lifting and rigging applications

PHOTO	ITEM NO.	SIZE
	ANT-BMC100	1"
	ANT-BMC200	2"
	ANT-MBC250	2-1/2"

## 4" Fix Hanger Round/Square

For mounting pendant or fluorescent lighting fixtures to a ceiling box

PHOTO	ITEM NO.	SIZE
	ANT-SCR75	Circular base
	ANT-SCS75	Square base

## Wall Mount J Hook

with Retainer Clip - Galvanized Steel Cable Management Hooks for Structured Cabling

PHOTO	ITEM NO.	SIZE
	ANT-658	2"

## Cable Support To Stud

Provides secure support of NMC or MC/AC to metal/wood stud in seconds. Spring Steel

PHOTO	ITEM NO.	SIZE
	ANT-CSTS	Outer Diameter(OD): 7/16" - 9/16 NM Cable Size: 14-2 to 12-3 MC/AC Cable Size: 14-2 to 12-3

## MC(BX) Cable One-Hole Strap

Used to secure AC/BX cable to wood, masonry or similar surface.

PHOTO	ITEM NO.	SIZE
	ANT-BXOS38	3/8"
	ANT-BXOS50	1/2"
	ANT-BXOS75	3/4"

## MC(BX) Cable Two-Hole Strap

Used to secure AC/BX cable to wood, masonry or similar surface.

PHOTO	ITEM NO.	SIZE
	ANT-BXOS38	3/8"
	ANT-BXOS50	1/2"
	ANT-BXOS75	3/4"

## Snap-in Cable Bracket

Clips onto flanges without tools or screws to wood, block, concrete, or metal studs. Secures MC/AC cables to studs.

PHOTO	ITEM NO.	SIZE
	MAC2	Flange Thickness: 1/8" MAX Stud Clip Size: 14-2 ~ 10-3 Std. Pkg:100

## Side Mount Flange Clip

Side Mount Flange Clamp, Fits 5/16 to 1/2" Flange, Hammer On, 1/4" Mounting Hole, Spring Steel

PHOTO	ITEM NO.	SIZE
	ANT-SMFC	5/16-1/2

# Product Information



Website: [newtonelectriq.com](http://newtonelectriq.com)



Contact: +1 (305) 902-1459

## Multi-Function Clip

Suitable for cabling industry, and home environment, for the organization of a variety of cables, suitable for heavy suspension, commonly seen in the ceiling

PHOTO	ITEM NO.	SIZE
	ANT-MFC	1/2" 5/8" Rod 1/4" Screw

## Cable J-Hook, PG

J-Hooks easily attaches to wood or concrete structures to provide support for data cables: fiber optic, innerduct and low voltage cables

PHOTO	ITEM NO.	HOOK DIAMETER
	CAT12	3/4"
	CAT16	1"
	CAT21	1-5/16"
	CAT32	2"
	CAT48	3"
	CAT64	4"

## Conduit Hanger

A curved or U-shaped design that wraps around the pipe for a secure grip.

PHOTO	ITEM NO.	SIZE
	ANT-CHT50	1/2"
	ANT-CHT75	3/4"
	ANT-CHT100	1"
	ANT-CHT125	1-1/4"
	ANT-CHT150	1-1/2"
	ANT-CHT200	2"
	ANT-CHT300	3"
	ANT-CHT400	4"
	ANT-CHT500	5"
	ANT-CHT600	6"
ANT-CHT800	8"	

## Malleable 90 Degree Liquid Tight Connectors

Used on flexible metallic liquid tight conduits and Type B flexible non-metallic liquid tight conduits to positively bond conduits to boxes or enclosures in both wet and damp locations

PHOTO	ITEM NO.	SIZE
	ANT-MGW50	1/2"
	ANT-MGW75	3/4"
	ANT-MGW100	1"
	ANT-MGW125	1-1/4"
	ANT-MGW150	1-1/2"
	ANT-MGW200	2"

## Cable Hanger

Can be used with 4H series flange clips, DH2/TDH deck clips, AO or AB nail brackets, Vf14 vertical flange, AF14/122/123 Z purlin

PHOTO	ITEM NO.	SIZE	STATIC LOAD(LBS.)	Diagram		
				A	B	C
	ANT-CH118	1-1/8" DIA Thickness:1/8"	50	2.94"	1.08"	2.14"
	ANT-CH134	1-3/4" DIA Thickness:1/8"	75	4.52"	1.34"	3.34"

## J-Hooks With Spring Steel Beam Clamp

J-Hooks with screw-on beam clamp feature allows the J-Hook to easily attach to beam flanges. J-Hooks provide support for data cables: fiber optic, inner-duct and low voltage.

PHOTO	ITEM NO.	HOOK DIAMETER	Diagram				
			A	B	C	D	E
	ANT-CAT12BCTZ	3/4"	1.65"	.748"	1.42"	.866"	3.32"
	ANT-CAT21BCTZ	1-5/16"	1.79"	1.24"	1.42"	1.64"	3.62"
	ANT-CAT32BCTZ	2"	2.50"	1.99"	1.42"	1.64"	4.37"

## J-Hooks Wall Mount With Mounting Holes

Can be attached to a wide variety of wall surfaces. J-Hooks provide support to sensitive voice and data cables without causing stress.

PHOTO	ITEM NO.	HOOK DIAMETER	MATERIAL	Diagram		
				A	B	C
	ANT-CAT12TZ	3/4"	Galvanized Steel	3.23	1.65"	.866"
	ANT-CAT21TZ	1-5/16"		3.62"	1.79"	1.64"
	ANT-CAT32TZ	2"		4.37"	2.50"	1.64"
	ANT-CAT64TZ	4"		4.48"	2.50"	1.91"
	ANT-JHK-12SS	3/4"	STAINLESS STEEL	3.23"	1.65"	.866"
	ANT-JHK-21SS	1-5/16"		3.62"	1.79"	1.64"
	ANT-JHK-32SS	2"		4.37"	2.50"	1.64"
	ANT-JHK-64SS	4"		4.48"	2.50"	1.91"

## Malleable Straight Liquid Tight Connectors

Straight liquidtight connectors for use with metallic type B liquid tight conduit to suit multiple applications

PHOTO	ITEM NO.	SIZE
	ANT-MGZ50	1/2"
	ANT-MGZ75	3/4"
	ANT-MGZ100	1"
	ANT-MGZ125	1-1/4"
	ANT-MGZ150	1-1/2"
	ANT-MGZ200	2"

## EMT Rain Tight Compression Coupling

Sharp teeth on locknuts ensure a solid bond and tight grip on surface of enclosure

PHOTO	ITEM NO.	SIZE
	ANT-ZC50	1/2"
	ANT-ZC75	3/4"
	ANT-ZC100	1"
	ANT-ZC125	1-1/4"
	ANT-ZC150	1-1/2"
	ANT-ZC200	2"

## Steel EMT Compression Connector

Used to bond EMT conduits to electrical junction boxes or enclosures. The steel construction ensures mechanical protection and the conduit to the designated electrical junction box or enclosure

PHOTO	ITEM NO.	SIZE
	ANT-ZCC50	1/2"
	ANT-ZCC75	3/4"
	ANT-ZCC100	1"
	ANT-ZCC125	1-1/4"
	ANT-ZCC150	1-1/2"
	ANT-ZCC200	2"

Photo	UL Listed Number	Description	Trade size	KO Size	Listed/Approved Cables
	ANT-38CP	Connectors with Insulated Throat, Zinc Die Cast	3/8"	1/2"	AC Cable, Aluminum

## 2.1.4-Zinc list

### Set Screw Connector, Zinc Die Cast

Used to connect EMT conduit to steel outlet boxes, metal enclosures, or load centers

PHOTO	ITEM NO.	SIZE
	ANT-ZL50	1/2"
	ANT-ZL75	3/4"
	ANT-ZL100	1"
	ANT-ZL125	1-1/4"
	ANT-ZL150	1-1/2"
	ANT-ZL200	2"
	ANT-ZL300	3"
	ANT-ZL400	4"

### Set Screw Coupling, Zinc Die Cast

A type of blind screw, designed to hold collars, pulleys, or gears on shafts

PHOTO	ITEM NO.	SIZE
	ANT-TS50	1/2"
	ANT-TS75	3/4"
	ANT-TS100	1"
	ANT-TS125	1-1/4"
	ANT-TS150	1-1/2"
	ANT-TS200	2"
	ANT-TS300	3"
	ANT-TS400	4"

### Romex Connector, Zinc Die Cast

Ensure easy connection of two or more cables or groups of wires in electrical engineering

PHOTO	ITEM NO.	SIZE
	ANT-RM38	3/8"
	ANT-RM50	1/2"
	ANT-RM75	3/4"
	ANT-RM100	1"
	ANT-RM125	1-1/4"
	ANT-RM150	1-1/2"
	ANT-RM200	2"

### Watertight Hub (Zinc Die Casting)

Used To Secure Conduit in an Enclosure To secure threaded Rigid Service

PHOTO	ITEM NO.	SIZE
	ANT-WH50	1/2"
	ANT-WH75	3/4"
	ANT-WH100	1"
	ANT-WH125	1-1/4"
	ANT-WH150	1-1/2"
	ANT-WH200	2"

### Compression Type Connector, Zinc Die Cast

Used to connect EMT conduit to steel outlet boxes, metal enclosures, or load centers.

PHOTO	ITEM NO.	SIZE
	ANT-TR50	1/2"
	ANT-TR75	3/4"
	ANT-TR100	1"
	ANT-TR125	1-1/4"
	ANT-TR150	1-1/2"
	ANT-TR200	2"

### EMT Compression Coupling Zinc Die Cast

Used to connect EMT conduit to steel outlet boxes, metal enclosures, or load centers

PHOTO	ITEM NO.	SIZE
	ANT-ECC50	1/2"
	ANT-ECC75	3/4"
	ANT-ECC100	1"
	ANT-ECC125	1-1/4"
	ANT-ECC150	1-1/2"
	ANT-ECC200	2"

### Liquid Tight Straight Connector

Used with metallic and nonmetallic "Type B" liquid tight conduit to a steel outlet box

PHOTO	ITEM NO.	SIZE
	ANT-SS50	1/2"
	ANT-SS75	3/4"
	ANT-SS100	1"
	ANT-SS125	1-1/4"
	ANT-SS150	1-1/2"
	ANT-SS200	2"
	ANT-SS300	3"
	ANT-SS400	4"

### Liquid Tight Angle Connector 90Degree

Used to terminate and seal Liquid-Tight Flexible Metal conduits to either

PHOTO	ITEM NO.	SIZE
	ANT-SD50	1/2"
	ANT-SD75	3/4"
	ANT-SD100	1"
	ANT-SD125	1-1/4"
	ANT-SD150	1-1/2"
	ANT-SD200	2"

### Straight Squeeze Connector, Zinc Die Cast

Used to connect flexible metal conduits to boxes, enclosures, lighting fixtures and other appliances

PHOTO	ITEM NO.	SIZE
	ANT-SQ38	3/8"
	ANT-SQ50	1/2"
	ANT-SQ75	3/4"
	ANT-SQ100	1"
	ANT-SQ125	1-1/4"
	ANT-SQ150	1-1/2"
	ANT-SQ200	2"
	ANT-SQ250	2-1/2"
	ANT-SQ300	3"

### Flexible Connector (Angle)

Used to connect flexible metal conduits to boxes, enclosures, lighting fixtures and other appliances

PHOTO	ITEM NO.	SIZE
	ANT-FA38	3/8"
	ANT-FA50	1/2"
	ANT-FA75	3/4"
	ANT-FA100	1"
	ANT-FA125	1-1/4"
	ANT-FA150	1-1/2"
	ANT-FA200	2"

### Conduit Bushing

Designed to cap off conduits that are not in use. Prevents damaging debris from entering conduit

PHOTO	ITEM NO.	SIZE
	ANT-CB50	1/2"
	ANT-CB75	3/4"
	ANT-CB100	1"
	ANT-CB125	1-1/4"
	ANT-CB150	1-1/2"
	ANT-CB200	2"
	ANT-CB250	2-1/2"
	ANT-CB300	3"
	ANT-CB350	3-1/2"
	ANT-CB400	4"

### Conduit Bushing with Insulated

Used with a locknut to bond a threaded IMC or RMC conduit to an electrical box

PHOTO	ITEM NO.	SIZE
	ANT-BI50	1/2"
	ANT-BI75	3/4"
	ANT-BI100	1"
	ANT-BI125	1-1/4"
	ANT-BI150	1-1/2"
	ANT-BI200	2"
	ANT-BI250	2-1/2"
	ANT-BI300	3"
	ANT-BI350	3-1/2"
	ANT-BI400	4"

## Conduit Bushing Zinc Die Casting with Terminal without Bakelite Cap

Used on threaded rigid or IMC conduits to prevent wires from being damaged by sharp edges on conduits

PHOTO	ITEM NO.	SIZE
	ANT-CT50	1/2"
	ANT-CT75	3/4"
	ANT-CT100	1"
	ANT-CT125	1-1/4"
	ANT-CT150	1-1/2"
	ANT-CT175	1-3/4"
	ANT-CT200	2"
	ANT-CT300	3"
	ANT-CT350	3-1/2"
	ANT-CT400	4"

## Offset Connector Zinc Die Casting

Used to join EMT conduit to a metal box or enclosure where offset is required

PHOTO	ITEM NO.	SIZE
	ANT-OC50	1/2"
	ANT-OC75	3/4"
	ANT-OC100	1"
	ANT-OC125	1-1/4"
	ANT-OC150	1-1/2"
	ANT-OC200	2"

## Double Flexible Conduit Duplex Connector

Designed to connect and bond 2 pieces of flexible metal conduit, AC, MC or NM cable to a steel outlet box or other metal enclosure

PHOTO	ITEM NO.	SIZE
	ANT-FD38	3/8"

## Duplex Connector

Designed to connect and bond 2 pieces of flexible metal conduit, AC, MC or NM cable to a steel outlet box or other metal enclosure

PHOTO	ITEM NO.	SIZE
	ANT-DC38	3/8"

## Pull Elbow for EMT or IMC/Rigid, Conduit to Box

Used as a wire pulling elbow to facilitate wire pulling through a sharp bend in a run of EMT or threaded Rigid or IMC conduit

PHOTO	ITEM NO.	SIZE
	ANT-TB50	1/2"
	ANT-TB75	3/4"
	ANT-TB100S	1" short
	ANT-TB100L	1" long

## EMT to EMT 90D Connector

Used to change the direction of EMT conduit runs in any direction by 90 angles

PHOTO	ITEM NO.	SIZE
	ANT-DC50	1/2"
	ANT-DC75	3/4"
	ANT-DC100	1"

## Saddle Connector

Used to bond steel or aluminum Flexible Metal Conduit, armored clad cable to an electrical steel box or enclosure

PHOTO	ITEM NO.	SIZE
	ANT-SC38	3/8"

## BX Connector

AC/MC connectors are used to terminate AC or MC to a knockout in a dry location box or enclosure.

PHOTO	ITEM NO.	SIZE
	ANT-C38	3/8"-1/2"

## EMT to Flexible 90D Connector

Used to bond steel or aluminum Flexible Metal Conduit, armored clad cable to an electrical steel box or enclosure

PHOTO	ITEM NO.	SIZE
	ANT-FC50	1/2"
	ANT-FC75	3/4"
	ANT-FC100	1"

## Flexible Connector With Locknut

Used with a locknut to Terminate Steel or Aluminum Flexible Metal Conduit

PHOTO	ITEM NO.	SIZE
	ANT-WL38	3/8"
	ANT-WL50	1/2"
	ANT-WL75	3/4"
	ANT-WL100	1"

## Weatherproof Box Holder

Provides support to 1/2-in rigid conduit

PHOTO	ITEM NO.	SIZE
	ANT-W38	3/8"-1/2"

## Steel EMT To Liquid Tight Combination Coupling Compression Type

Used to bond EMT conduit to metallic flexible conduit

PHOTO	ITEM NO.	SIZE
	ANT-CELT50	1/2"
	ANT-CELT75	3/4"
	ANT-CELT100	1"

## Flexible Conduit Coupling

Allows conduit to be connected at a right angle, avoiding bending stress on the wiring and conduit at the enclosure connection

PHOTO	ITEM NO.	SIZE
	ANT-CC38	3/8"
	ANTCC50	1/2"
	ANT-CC75	3/4"
	ANT-CC100	1"

## EMT to Romex Connector

To fix non-metallic sheathed cable and flexible cord to steel outlet boxes or other metal enclosures

PHOTO	ITEM NO.	SIZE
	ANT-RC38	3/8"
	ANT-RC50	1/2"
	ANT-RC75	3/4"
	ANT-RC100	1"

## Steel Rigid to Liquid Tight combination Coupling Threaded/ Compression Type

Used to bond RGD/IMC conduit to metallic flexible conduit

PHOTO	ITEM NO.	SIZE
	ANT-CCPL38	3/8"
	ANT-CCPL50	1/2"
	ANT-CCPL75	3/4"
	ANT-CCPL100	1"

## Steel Rigid To EMT Coupling Compression Type

Used to bond RGD/ IMC To EMT Conduit Connector

PHOTO	ITEM NO.	SIZE
	ANT-CER50	1/2"
	ANT-CER75	3/4"
	ANT-CER100	1"



## Steel Rigid Connector Set-Screw Type

Used in dry locations to bond unthreaded rigid or IMC conduits to electrical junction boxes or electrical enclosures

PHOTO	ITEM NO.	SIZE
	ANT-RS50	1/2"
	ANT-RS75	3/4"
	ANT-RS100	1"
	ANT-RS125	1-1/4"
	ANT-RS150	1-1/2"
	ANT-RS200	2"

## Steel Rigid Coupling Set-Screw Type

Used in dry locations to connect the ends of two unthreaded rigid or IMC conduits together

PHOTO	ITEM NO.	SIZE
	ANT-RSC50	1/2"
	ANT-RSC75	3/4"
	ANT-RSC100	1"
	ANT-RSC125	1-1/4"
	ANT-RSC150	1-1/2"
	ANT-RSC200	2"

## Insulated Straight Liquid Tight Connector With Aluminum Lay-In Lug - Malleable Iron

Leak-proof, corrosion-resistant, suitable for complex or harsh environments where liquid protection and insulation are required

PHOTO	ITEM NO.	SIZE
	ANT-MTIS-38	3/8"
	ANT-MTIS-50	1/2"
	ANT-MTIS-75	3/4"
	ANT-MTIS-100	1"
	ANT-MTIS-125	1-1/4"
	ANT-MTIS-150	1-1/2"
	ANT-MTIS-200	2"
	ANT-MTIS-250	2-1/2"
	ANT-MTIS-300	3"
	ANT-MTIS-350	3-1/2"
ANT-MTIS-400	4"	

## Insulated Straight Liquid Tight Connector With Aluminum Lay-In Lug - Malleable Iron

Leak-proof, corrosion-resistant, suitable for complex or harsh environments where liquid protection and insulation are required

PHOTO	ITEM NO.	SIZE
	ANT-MTI90-38	3/8"
	ANT-MTI90-50	1/2"
	ANT-MTI90-75	3/4"
	ANT-MTI90-100	1"
	ANT-MTI90-125	1-1/4"
	ANT-MTI90-150	1-1/2"
	ANT-MTI90-200	2"
	ANT-MTI90-250	2-1/2"
	ANT-MTI90-300	3"
	ANT-MTI90-350	3-1/2"
ANT-MTI90-400	4"	

## Lock Nuts - Stainless Steel

Used to fix and connect various parts quickly and easily

PHOTO	ITEM NO.	SIZE
	ANT-LC50	1/2"
	ANT-LC75	3/4"
	ANT-LC100	1"
	ANT-LC125	1-1/4"
	ANT-LC150	1-1/2"
	ANT-LC200	2"
	ANT-LC250	2-1/2"
	ANT-LC300	3"
	ANT-LC350	3-1/2"
ANT-LC400	4"	

## Steel Knock Out Seals

Electric Conduit Seal Knockout

PHOTO	ITEM NO.	SIZE
	ANT 12	1/2"
	ANT 34	3/4"

PHOTO	ITEM NO.	SIZE
	ANT-QL50S	FOR 14/4 TO 10/3, FOR 3/8" FMC
	ANT-QL50D	FOR 14/4 TO 10/3
	ANT-QL75	FOR 10/3 TO 6/3, FOR 3/8" TO 1/2" FMC

## 2.2 PVC Conduits and Fittings

### 2.2.1-pvc conduit and fittings

#### PVC Terminal Adapter

Transition from a spigot end PVC conduit to a threaded metal or PVC plastic female bell end.

PHOTO	ITEM NO.	SIZE
	ANTM 40PVC-50	1/2"
	ANTM 40PVC-75	3/4"
	ANTM 40PVC-100	1"
	ANTM 40PVC-125	1-1/4"
	ANTM 40PVC-150	1-1/2"
	ANTM 40PVC-200	2"
	ANTM 40PVC-250	2-1/2"
	ANTM 40PVC-300	3"

#### Female Adapter

Schedule 40 pvc female adapters.

PHOTO	ITEM NO.	SIZE
	ANTFA40PVC-50	1/2"
	ANTFA40PVC-75	3/4"
	ANTFA40PVC-100	1"
	ANTFA40PVC-125	1-1/4"
	ANTFA40PVC-150	1-1/2"
	ANTFA40PVC-200	2"
	ANTFA40PVC-250	2-1/2"
	ANTFA40PVC-300	3"

#### SCH40 PVC Coupling

Used to join two pieces of PVC pipe to continue a straight line.

PHOTO	ITEM NO.	SIZE
	ANTCPVC40-50	1/2"
	ANTCPVC40-75	3/4"
	ANTCPVC40-100	1"
	ANTCPVC40-125	1-1/4"
	ANTCPVC40-150	1-1/2"
	ANTCPVC40-200	2"
	ANTCPVC40-250	2-1/2"
	ANTCPVC40-300	3"

#### PVC Conduit Cap

A protective fitting used to seal the end of PVC conduits in electrical systems.

PHOTO	ITEM NO.	SIZE
	ANTEND40PVC-50	1/2"
	ANTEND40PVC-75	3/4"
	ANTEND40PVC-100	1"
	ANTEND40PVC-125	1-1/4"
	ANTEND40PVC-150	1-1/2"
	ANTEND40PVC-200	2"
	ANTEND40PVC-250	2-1/2"
	ANTEND40PVC-300	3"

#### Terminal Adapter

Used to provide a conduit entrance for electrical wiring or cables required per application

PHOTO	ITEM NO.	SIZE
	ANTTA40PVC-50	1/2"
	ANTTA40PVC-75	3/4"
	ANTTA40PVC-100	1"
	ANTTA40PVC-125	1-1/4"
	ANTTA40PVC-150	1-1/2"
	ANTTA40PVC-200	2"
	ANTTA40PVC-250	2-1/2"
	ANTTA40PVC-300	3"

#### Pipe Strap (2 Holes)

Used to securely mount conduit to a wall or other structure for support.

PHOTO	ITEM NO.	SIZE
	ANTTHSPVC-50	1/2"
	ANTTHSPVC-75	3/4"
	ANTTHSPVC-100	1"
	ANTTHSPVC-125	1-1/4"
	ANTTHSPVC-150	1-1/2"
	ANTTHSPVC-200	2"
	ANTTHSPVC-250	2-1/2"
	ANTTHSPVC-300	3"



## PVC Terminal Adapter

Transition from a spigot end PVC conduit to a threaded metal or PVC plastic female bell end.

PHOTO	ITEM NO.	SIZE
	ANT-DP50	1/2"
	ANT-DP75	3/4"
	ANT-DP100	1"
	ANT-DP125	1-1/4"
	ANT-DP150	1-1/2"
	ANT-DP200	2"
	ANT-DP300	3"

## PVC Box Adapter

Designed to change the end type of a pipe, allowing it to connect to fittings and pipes of many sizes.

PHOTO	ITEM NO.	SIZE
	ANT40PVC-7550	3/4"
	ANT40PVC-10075	1"
	ANT40PVC-125100	1-1/4"
	ANT40PVC-150125	1-1/2"
	ANT40PVC-200150	2"
	ANT40PVC-250200	2-1/2"
	ANT40PVC-300200	3"

## PVC Expansion Coupling

Designed to compensate for length changes due to temperature variations in exposed conduit runs.

PHOTO	ITEM NO.	SIZE
	ANTEXP40PVC-50	1/2"
	ANTEXP40PVC-75	3/4"
	ANTEXP40PVC-100	1"
	ANTEXP40PVC-125	1-1/4"
	ANTEXP40PVC-150	1-1/2"
	ANTEXP40PVC-200	2"
	ANTEXP40PVC-250	2-1/2"
	ANTEXP40PVC-300	3"

## PVC "LB" Conduit Body

Used for a change of direction of the conduit run with the back hub usually exiting through a wall.

PHOTO	ITEM NO.	SIZE
	ANTLBPVC-50	1/2"
	ANTLBPVC-75	3/4"
	ANTLBPVC-100	1"
	ANTLBPVC-125	1-1/4"
	ANTLBPVC-150	1-1/2"
	ANTLBPVC-200	2"
	ANTLBPVC-250	2-1/2"
	ANTLBPVC-300	3"

## PVC Box Adapter

Adapts plastic conduit to all electrical boxes.

PHOTO	ITEM NO.	SIZE
	ANTBXPVC-50	1/2"
	ANTBXPVC-75	3/4"
	ANTBXPVC-100	1"
	ANTBXPVC-125	1-1/4"
	ANTBXPVC-150	1-1/2"
	ANTBXPVC-200	2"
	ANTBXPVC-250	2-1/2"
	ANTBXPVC-300	3"

## PVC Service Entrance Caps

Designed for use with Sch40 and Sch80 rigid non-metallic conduit (RNC).

PHOTO	ITEM NO.	SIZE
	ANTSPVC-125	1-1/4"
	ANTSPVC-150	1-1/2"
	ANTSPVC-200	2"
	ANTSPVC-250	2-1/2"

## PVC "T" Conduit Body

Non-threaded body hub made of PVC.

PHOTO	ITEM NO.	SIZE
	ANTTPVC-50	1/2"
	ANTTPVC-75	3/4"
	ANTTPVC-100	1"
	ANTTPVC-125	1-1/4"
	ANTTPVC-150	1-1/2"
	ANTTPVC-200	2"

## PVC "LL" Conduit Body

Provides pull, splice, and tap access for conductors in a conduit system along with a change in direction.

PHOTO	ITEM NO.	SIZE
	ANTLLPVC-50	1/2"
	ANTLLPVC-75	3/4"
	ANTLLPVC-100	1"
	ANTLLPVC-125	1-1/4"
	ANTLLPVC-150	1-1/2"
	ANTLLPVC-200	2"

## PVC Threaded Insulating Bushing

Insulating bushings provide a smooth surface that protects wires, being used on the end of rigid conduit, IMC or other threaded connectors

PHOTO	ITEM NO.	SIZE
	ANT-ECP50	1/2"
	ANT-ECP75	3/4"
	ANT-ECP100	1"
	ANT-ECP125	1-1/4"
	ANT-ECP150	1-1/2"
	ANT-ECP200	2"
	ANT-ECP250	2-1/2"
	ANT-ECP300	3"
ANT-ECP350	3-1/2"	
ANT-ECP400	4"	

## Meter Offset Entrance Caps

Fits on the top of a mast where an overhead cable supplies power from a main power line to a building.

PHOTO	ITEM NO.	SIZE
	ANTOFPVC40-125	1-1/4"
	ANTOFPVC40-200	2"

## PVC "LR" Conduit Body

schedule 40 pvc LR type conduit bodies and junction boxes.

PHOTO	ITEM NO.	SIZE
	ANTLRPVC-50	1/2"
	ANTLRPVC-75	3/4"
	ANTLRPVC-100	1"
	ANTLRPVC-125	1-1/4"
	ANTLRPVC-150	1-1/2"
	ANTLRPVC-200	2"

## PVC ENT Conduit

A corrugated flexible conduit that is used for electrical raceways, easy to pull cables and wires through the tubing.

PHOTO	ITEM NO.	SIZE
	ANTENT200F-50	1/2"
	ANTENT100F-75	3/4"
	ANTENT100F-100	1"

## Pull Elbow Body

Used at bends in conduit runs to allow straight pulls at bends.

PHOTO	ITEM NO.	SIZE
	ANTEPE40PVC-75	3/4"

## PVC "C" Conduit Body

Schedule 40 PVC C type conduit bodies with junction boxes.

PHOTO	ITEM NO.	SIZE
	ANTCPVC-50	1/2"
	ANTCPVC-75	3/4"
	ANTCPVC-100	1"

## PVC Conduit Offset

Used to connect two boxes or enclosures when knockouts are not in line, offset the conduits by a certain angle.

PHOTO	ITEM NO.	SIZE
	ANTOF40PVC-50	1/2"
	ANTOF40PVC-75	3/4"

## 90-Degree Sch40 Belled End Elbow

Used to make a 90-degree connection between straight lengths of SCH80 pipe.

PHOTO	ITEM NO.	SIZE
	ANT40PVC-9050	1/2"
	ANT40PVC-9075	3/4"
	ANT40PVC-90100	1"
	ANT40PVC-90125	1-1/4"
	ANT40PVC-90150	1-1/2"
	ANT40PVC-90200	2"
	ANT40PVC-90250	2-1/2"
	ANT40PVC-90300	3"

## 45-Degree Sch40 Belled End Elbow

Used to make a 45-degree connection between straight lengths of SCH40 pipe.

PHOTO	ITEM NO.	SIZE
	ANT40PVC-4550	1/2"
	ANT40PVC-4575	3/4"
	ANT40PVC-45100	1"
	ANT40PVC-45125	1-1/4"
	ANT40PVC-45150	1-1/2"
	ANT40PVC-45200	2"
	ANT40PVC-45250	2-1/2"
	ANT40PVC-45300	3"

## Non-Metallic Liquid Tight Angle 90° Connector

Used to connect non-metallic liquid tight conduit and flexible non-metallic tubing to enclosure

PHOTO	ITEM NO.	SIZE
	ANT-D38	3/8"
	ANT-D50	1/2"
	ANT-D75	3/4"
	ANT-D100	1"
	ANT-D125	1-1/4"
	ANT-D150	1-1/2"
	ANT-D200	2"

## Flexible Non-Metallic Liquid Tight Conduit

Corrosion-resistant, oil-resistant, water-resistant, smooth inside, for outdoor or buried underground waterproof cable pipeline

PHOTO	ITEM NO.	SIZE
	ANT-D38	3/8"
	ANT-D50	1/2"
	ANT-D75	3/4"
	ANT-D100	1"
	ANT-D125	1-1/4"
	ANT-D150	1-1/2"
	ANT-D200	2"

## Sch40 Rigid PVC Conduit

Used for electrical wiring in walls, floors and ceilings and can be buried directly in soil, wrapped in concrete and used in direct sunlight.

PHOTO	ITEM NO.	SIZE
	ANT40PVC-50	1/2" x 2.77
	ANT40PVC-75	3/4" x 2.87
	ANT40PVC-100	1" x 3.38
	ANT40PVC-125	1-1/4" x 3.56
	ANT40PVC-150	1-1/2" x 3.68
	ANT40PVC-200	2" x 3.91
	ANT40PVC-250	2-1/2" x 5.16
	ANT40PVC-300	3" x 5.49
	ANT40PVC-400	4" x 6.03

## 45-Degree Sch80 Plain End Elbow

Used to make a 45-degree connection between straight lengths of SCH80 pipe.

PHOTO	ITEM NO.	SIZE
	ANT80PVC-4550	1/2"
	ANT80PVC-4575	3/4"
	ANT80PVC-45100	1"
	ANT80PVC-45200	2"

## A/C Whip Kit

Non Metal AC Whip for HVAC, Mini Split Systems, Outdoor Lighting, Solar Panel and More - Flexible Non-Metallic Liquid Tight Conduit - Liquid Tight Connectors.

PHOTO	ITEM NO.	SIZE	DESCRIPTION
	NCW126(10)	1/2" x 6ft	PVC Conduit A/C Whip 3*10AWG
	NCW346(2*8&1*10)	3/4" x 6ft	PVC Conduit A/C Whip 2*8AWG&1*10AWG
	NCW126(8)	1/2" x 6ft	PVC Conduit A/C Whip 3*8AWG
	NCW346(8)	3/4" x 6ft	PVC Conduit A/C Whip 3*8AWG UL Listed

## Drain Line For Air Conditioner Units

The 14mm inner diameter of our drain hose ensures efficient and smooth condensate water removal, helping to maintain the optimal performance of your air conditioner.

PHOTO	ITEM NO.	SIZE
	ANT-AC16	Thickness: 1mm Single roll : 50 M Single roll weights: 1.55 kg

## 90-Degree Sch80 Plain End Elbow

Used to make a 90-degree connection between straight lengths of SCH80 pipe.

PHOTO	ITEM NO.	SIZE
	ANT80PVC-9050	1/2"
	ANT80PVC-9075	3/4"
	ANT80PVC-90100	1"
	ANT80PVC-90125	1-1/4"
	ANT80PVC-90150	1-1/2"
	ANT80PVC-90200	2"
	ANT80PVC-90250	2-1/2"
	ANT80PVC-90300	3"

## Non-Metallic Liquid Tight Straight Connector

Used to connect non-metallic liquid tight conduit and flexible non-metallic tubing to enclosure

PHOTO	ITEM NO.	SIZE
	ANT-S38	3/8"
	ANT-S50	1/2"
	ANT-S75	3/4"
	ANT-S100	1"
	ANT-S125	1-1/4"
	ANT-S150	1-1/2"
	ANT-S200	2"

## Cable Snap Bushing

Insulating bushings provide a smooth surface that protects wires, being used on the end of rigid conduit, IMC or other threaded connectors

PHOTO	ITEM NO.	SIZE
	XT BUSHING1/2	0.45"H X 0.87"W
	XT BUSHING3/4	0.45"H X 1.00"W

## Non-Metallic Hit Lock Cable Connector (PVC)

Insulating bushings provide a smooth surface that protects wires, being used on the end of rigid conduit, IMC or other threaded connectors

PHOTO	ITEM NO.	SIZE
	ANT BUSHING1/2	1/2"



Plastic Stud Bushing		
Protect non metallic cable and conduit from damage running through metal studs, 24 to 12 AWG cable size		
PHOTO	ITEM NO.	SIZE
	ANT-Y68	1-11/32In

Anti Short Bushing		
ASB anti-short bushing, AC/MC and FMC, 90°C temperature rating		
PHOTO	ITEM NO.	SIZE
	ANT-B16	5/16"
	ANT-B38	3/8"
	ANT-B716	7/16"
	ANT-B12	1/2"
	ANT-B34	3/4"

Non-Metallic Cable Connector		
Snap Style Installation - Labor Saving, for Confined Areas		
PHOTO	ITEM NO.	SIZE
	DLK-1	Grey 1/2"
	DLK-2	Red 3/4"

ENT Angled Form Stubby		
PHOTO	ITEM NO.	Description
	XP-10	1/2" Non-Metallic 45 Degrees PVC ENT Conduit Angled Form Stubby. Material:PP
	XP-15	3/4" Non-Metallic 45 Degrees PVC ENT Conduit Angled Form Stubby. Material:PP
	XP-20	1" Non-Metallic 45 Degrees PVC ENT Conduit Angled Form Stubby. Material:PP
	XP-25	1-1/4" Non-Metallic 45 Degrees PVC ENT Conduit Angled Form Stubby. Material:PP

ENT Transition Couplings		
PHOTO	ITEM NO.	Description
	KTC15	3/4" Non-Metallic ENT-to-EMT Transition Coupling. Material:PVC
	KTC20	1" Non-Metallic ENT-to-EMT Transition Coupling. Material:PVC

ENT Stub Down Fitting		
PHOTO	ITEM NO.	Description
	WT-1	3/4"X1/2" Non-Metallic 90 Degrees PVC ENT Conduit Stub Down Fitting. Material:PVC

## 2.2.2-ENT fittings

ENT Couplings		
PHOTO	ITEM NO.	Description
	KC10	1/2" Non-Metallic ENT Snap-On Coupling. Material:PVC
	KC15	3/4" Non-Metallic ENT Snap-On Coupling. Material:PVC
	KC20	1" Non-Metallic ENT Snap-On Coupling. Material:PVC

ENT Form Stubby		
PHOTO	ITEM NO.	Description
	PG-10	1/2" Non-Metallic ENT Plain End Form Stubby. Material:PP
	PG-15	3/4" Non-Metallic ENT Plain End Form Stubby. Material:PP
	PG-20	1" Non-Metallic ENT Plain End Form Stubby. Material:PP
	PG-25	1-1/4" Non-Metallic ENT Plain End Form Stubby. Material:PP

ENT Connector		
PHOTO	ITEM NO.	Description
	KTA-10	1/2" Non-Metallic Threaded Male ENT Conduit Connector. Material:PVC
	KTA-15	3/4" Non-Metallic Threaded Male ENT Conduit Connector. Material:PVC
	KTA-20	1" Non-Metallic Threaded Male ENT Conduit Connector. Material:PVC

ENT Adapter		
PHOTO	ITEM NO.	Description
	ZT-1	3/4"X1/2" Non-Metallic ENT Adapter AC90. Material:PVC

## 2.3 PVC SCH40 Pressure Pipe & Fittings

**PVC PRESSURE PIPE** ITEM NO.: AN23



NSF



Size	Nom	OUTER DIAMETER	WALL TAICKNESS
1/2"		21.34	2.77
3/4"		26.67	2.87
1"		33.4	3.38
1-1/4"		42.16	3.56
1-1/2"		48.26	3.68
2"		60.32	3.91
2-1/2"		73.03	5.16
3"		88.9	5.49
4"		114.3	6.02
6"		168.3	7.11

**TEE** ITEM NO.: ANO3


NSF

Size	Nom	U	U	U	U
1/2"		21.54	27.08	17.48	60.36
3/4"		26.87	32.61	18.28	64.64
1"		33.66	40.42	22.23	79.38
1-1/4"		42.42	49.54	23.83	92.12
1-1/2"		48.56	55.92	27.79	106.38
2"		60.63	68.45	29.36	122.22
2-1/2"		73.02	84.40	45	168.2
3"		89.31	100.13	47.63	187.34
4"		114.76	126.82	50.8	219.08

**CAP** ITEM NO.: ANO2


NSF

Size	Nom	D1	D	L	H
1/2"		21.54	27.08	17.48	20.25
3/4"		26.87	32.61	18.28	21.13
1"		33.66	40.42	22.23	25.61
1-1/4"		42.42	49.54	23.83	27.39
1-1/2"		48.56	55.92	27.79	31.47
2"		60.63	68.45	29.36	33.27
2-1/2"		73.02	84.40	45	50
3"		89.31	100.13	47.63	52.96
4"		114.76	126.82	50.8	56.83

**90 DEG ELBOW** ITEM NO.: ANO6


NSF

Size	Nom	D	D	L
1/2"		21.54	27.08	17.48
3/4"		26.87	32.61	18.28
1"		33.66	40.42	22.23
1-1/4"		42.42	49.54	23.83
1-1/2"		48.56	55.92	27.79
2"		60.63	68.45	29.36
2-1/2"		73.02	84.40	45
3"		89.31	100.13	47.63
4"		114.76	126.82	50.8

**COUPLING** ITEM NO.: ANO1


NSF

Size	Nom	d	D	L	H
1/2"		21.54	27.08	17.48	37.34
3/4"		26.87	32.61	18.28	38.9
1"		33.66	40.42	22.23	46.8
1-1/4"		42.42	49.54	23.83	50.04
1-1/2"		48.56	55.92	27.79	57.96
2"		60.63	68.45	29.36	61.1
2-1/2"		73.02	84.40	45	94.8
3"		89.31	100.13	47.63	100.02
4"		114.76	126.82	50.8	106.36

**FEMALE ADAPTER** ITEM NO.: ANO4


NSF

Size	Nom	U	U	U	U	U
1/2"		21.54	27.08	1/2"	17.48	39.71
3/4"		26.87	32.61	3/4"	18.28	40.79
1"		33.66	40.42	1"	22.23	49.62
1-1/4"		42.42	49.54	1-1/4"	23.83	51.83
1-1/2"		48.56	55.92	1-1/2"	27.79	56.21
2"		60.63	68.45	2"	29.36	59.62
3"		89.31	100.13	3"	47.63	93.89
4"		114.76	126.82	4"	50.8	99.6

**MALE ADAPTER** ITEM NO.: ANO5

NSF

Size	Nom	d	D	d1	R	L	H
1/2"		21.54	27.08	13.8	1/2"	17.48	39.71
3/4"		26.87	32.61	18.85	3/4"	18.28	41.29
1"		33.66	40.42	24.3	1"	22.23	49.62
1-1/4"		42.42	49.54	32.46	1-1/4"	23.83	51.83
1-1/2"		48.56	55.92	38.1	1-1/2"	27.79	56.18
2"		60.63	68.45	49.24	2"	29.36	58.62
3"		89.31	100.13	73.66	3"	47.63	93.89
4"		114.76	126.82	97.18	4"	50.8	99.6
3/4"*1/2"		26.87	32.61	13.8	1/2"	18.5	43.35
1/2"*3/4"		27.08	27.08	19	3/4"	17.5	42.75
1*3/4"		33.66	40.42	19	3/4"	22.23	47.78
3/4"*1"		33.66	32.61	24	1"	18.5	58.35

## 45 DEG ELBOW

ITEM NO.: AN07

NSF




Size	Nom	d	D	L
1/2"		21.54	27.08	17.48
3/4"		26.87	32.61	18.28
1"		33.66	40.42	22.23
1-1/4"		42.42	49.54	23.83
1-1/2"		48.56	55.92	27.79
2"		60.63	68.45	29.36
2-1/2"		73.02	84.40	45
3"		89.31	100.13	47.63
4"		114.76	126.82	50.8

## FEMALE TEE

ITEM NO.: AN08

NSF

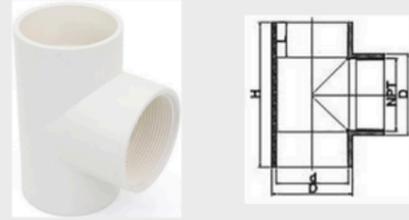


Size	Nom	d	D	NPT	L	H
1/2"		21.54	27.08	1/2"	17.48	60.36
3/4"		26.87	32.61	3/4"	18.28	64.64
1"		33.66	40.42	1"	22.23	79.38
1-1/2"		48.56	55.92	1-1/2"	27.79	106.38
1-1/4"		42.42	50		23.9	92.26
2"		60.63	68.45		29.4	122.3

## REDUCING BUSHING

ITEM NO.: AN11

NSF

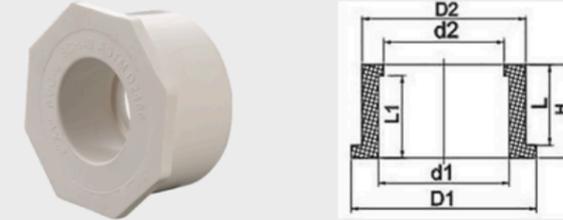


Size	Nom	D1	d1	D2	d2	H	L1	L
3/4" x 1/2"		32.87	21.54	26.67	14.68	17.48	18.26	21.26
1" x 1/2"		40.0	21.54	33.4	14.68	17.48	22.23	25.23
1" x 3/4"		40.0	26.87	33.4	18.8	18.26	22.23	25.23
1-1/4" x 1/2"		49.0	21.54	42.16	14.68	17.48	23.83	26.83
1-1/4" x 3/4"		49.0	26.87	42.16	18.8	18.26	23.83	26.83
1-1/4" x 1"		49.0	33.66	42.16	25.15	22.23	23.83	26.83
1-1/2" x 1/2"		59.0	21.54	48.26	14.68	17.48	27.79	30.79
1-1/2" x 3/4"		59.0	26.87	48.26	18.8	18.26	27.79	30.79
1-1/2" x 1"		59.0	33.66	48.26	25.15	22.23	27.79	30.79
1-1/2" x 1-1/4"		59.0	42.42	48.26	33.91	23.83	27.79	30.79
2" x 1/2"		70	21.54	60.33	14.68	17.48	29.36	34.36
2" x 3/4"		70	26.87	60.33	18.8	18.26	29.36	34.36
2" x 1"		70	33.66	60.33	25.15	22.23	29.36	34.36
2" x 1-1/4"		70	42.42	60.33	33.91	23.83	29.36	34.36
2" x 1-1/2"		70	48.56	60.33	39.73	27.79	29.36	34.36
3" x 1-1/2"		95	48.56	88.9	39.73	27.79	47.63	52.63
3" x 2"		95	60.63	88.9	51.33	29.36	47.63	52.63
4" x 2"		121	60.63	114.3	51.33	29.36	50.8	55.8
4" x 3"		121	89.31	114.3	76.4	47.63	50.8	55.8
6" x 4"		178.9	114.76	168.28	100.61	50.8	76.2	81.2

## FEMALE ELBOW

ITEM NO.: AN09

NSF

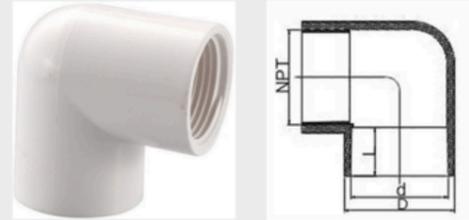


Size	Nom	d	D	NPT	L
1/2"		21.54	27.08	1/2"	17.48
3/4"		26.87	32.61	3/4"	18.28
1"		33.66	40.42	1"	22.23
1-1/4"		42.42	49.54	1-1/4"	23.83
1-1/2"		48.56	55.92	1-1/2"	27.79
2"		60.63	68.45	2"	29.36

## PLUG

ITEM NO.: AN16

NSF

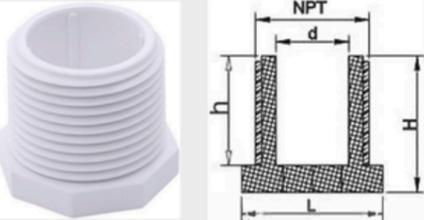

Size	Nom	d	NPT	L	h	H
1/2"		13.8	1/2"	27	19.85	24.85
3/4"		18.85	3/4"	32	20.15	25.15
1"		24.3	1"	42	25.01	32.01
1-1/4"		32.46	1-1/4"	50	25.62	34.62
1-1/2"		38.1	1-1/2"	60	26.04	35.04
2"		49.24	2"	70	26.88	36.88

## BOX WITH CAP

ITEM NO.: AN41



SIZE

4" x 2"

## BOX OCTAGONAL

ITEM NO.: AN42




SIZE

4"

## REDUCING TEE

ITEM NO.:AN10

NSF

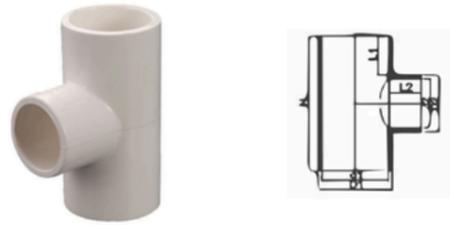


Size	Nom	d1	d2	L1	D2	L1	L2	H
3/4" x 1/2"		26.87	21.54	32.61	27.08	18.28	17.48	64.64
1" x 1/2"		33.66	21.54	40.42	27.08	22.23	17.48	79.38
1" x 3/4"		33.66	26.87	40.42	32.61	22.23	18.28	79.38
2" x 3/4"		60.63	26.87	68.45	32.61	29.36	18.28	122.22

## REDUCING COUPLING

ITEM NO.:AN12


NSF

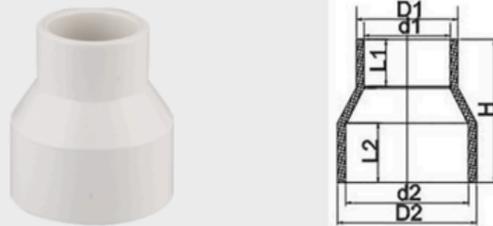

Size	Nom	D2	d2	D1	d1	H	L1	L1
3/4" x 1/2"		32.61	26.87	27.08	21.54	44.39	18.28	17.48
1" x 1/2"		40.42	33.66	27.08	21.54	57.09	21.23	17.48
1" x 3/4"		40.42	33.66	32.61	26.87	55.88	21.23	18.28
1-1/4" x 3/4"		49.54	42.42	32.61	26.87	62.93	23.84	18.28
1-1/4" x 1"		49.54	42.42	40.42	33.66	61.9	23.84	22.23
1-1/2" x 3/4"		55.92	48.56	32.61	26.87	71.69	27.79	18.28
1-1/2" x 1"		55.92	48.56	40.42	33.66	70.22	27.79	22.23
1-1/2" x 1-1/4"		55.92	48.56	49.54	42.42	66.19	27.79	23.84
2" x 1"		68.45	60.63	40.42	33.66	76.79	29.36	22.23
2" x 1-1/4"		68.45	60.63	49.54	42.42	78.39	29.36	23.84
2" x 1-1/2"		68.45	60.63	49.54	42.42	82.35	29.36	23.84
2-1/2" x 1-1/2"		83.7	73.38	55.92	48.56	100.66	44.45	27.79
2-1/2" x 2"		83.7	73.38	68.45	60.63	102.23	44.45	29.36
3" x 2"		100.13	89.31	68.48	60.63	111.01	47.63	29.36
3" x 2-1/2"		100.13	89.31	83.7	73.38	126.1	47.63	44.45
4" x 2"		126.82	114.76	68.45	60.63	121.18	50.8	29.36
4" x 2-1/2"		126.82	114.76	83.7	73.38	126.27	50.8	44.45
4" x 3"		126.82	114.76	100.13	89.31	139.45	50.8	47.63

## BOX OCTAGONAL


ITEM NO.:AN27

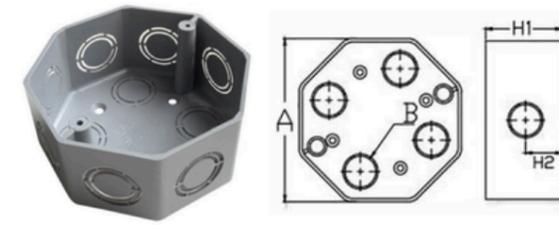

Size	Nom	A	B	H1	H2
4"		102	27	48	23

## SQUARE BOX


ITEM NO.:AN28

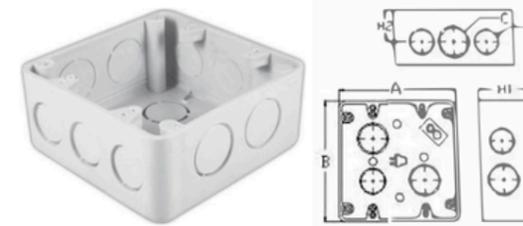

Size	Nom	A	B	C	D	H1	H2
4"		107	107	28	22	48.5	25.5

## HANDY BOX

ITEM NO.:AN29

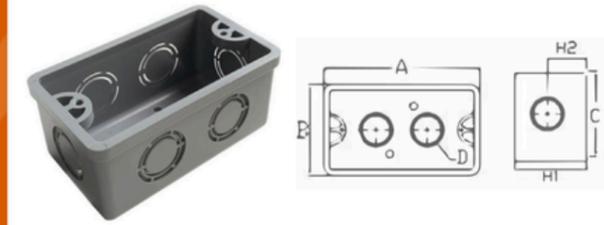

Size	Nom	A	B	C	D	H1	H2
4" x 2"		107	62	58	22	49	27

## PVC CONDUIT MALE CONECTOR


ITEM NO.:AN24



Size	Nom	A	B	C	D
1/2"		21.54	21.23	17.48	1/2NPT
3/4"		26.87	26.57	18.26	3/4NPT
1"		33.66	33.27	22.23	1NPT
1-1/4"		42.42	42.04	23.83	1-1/4NPT
1-1/2"		48.56	48.11	27.79	1-1/2NPT
2"		60.63	60.17	29.36	2NPT

## DWV COUPLER


ITEM NO.:D01

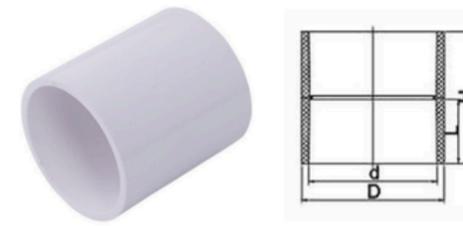

Size	Nom	d	D	L	H
1-1/2"		48.26	56.8	17.6	40.0
2"		60.32	68.8	19.2	44.0
3"		88.90	100.7	38.2	82.6
4"		114.30	127.7	44.6	95.8
6"		168.28	183.3	76.5	159.0

## DWV 45 DEG ELBOW

ITEM NO.:D03

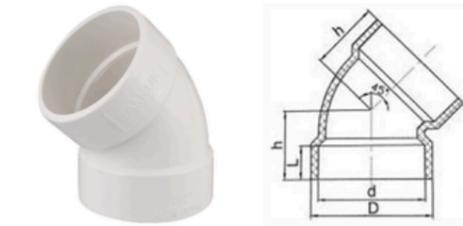


Size	Nom	d	D	L	H
1-1/2"		48.26	56.8	35.3	17.6
2"		60.32	68.8	39.4	19.2
3"		88.9	100.7	66.6	38.2
4"		114.3	127.7	79.3	44.6
6"		168.28	183.3	125	76.5



## DWV 90DEG TEE (II)


ITEM NO.:D04

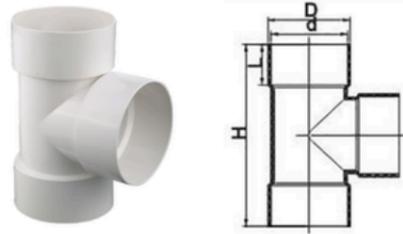

Size	Nom	d	D	L	H
2"	65.11	60.11	115.5	19.05	
3"	88.9	93.0	40.8	178.2	
4"	114.3	118.7	43.5	208.5	

## DWV BEND


ITEM NO.:D06

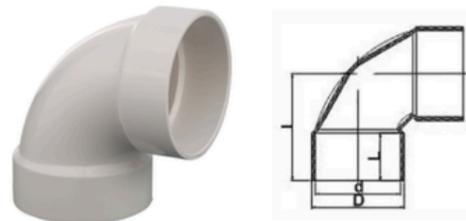

Size	Nom	d	D	L	I
1-1/2"	48.26	55.5	19.0	52.8	
2"	60.32	66.2	23.4	65.3	
3"	88.90	94.2	38.8	116.8	
4"	114.30	120.4	46.1	138.8	
6"	168.28	176.1	75.8	177.9	

## DWV 90DEG ELBOW (II)


ITEM NO.:D02

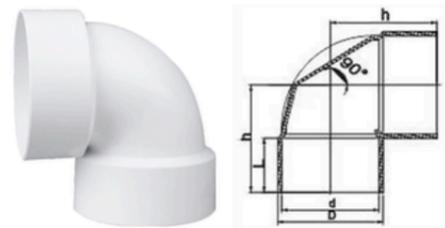

Size	Nom	d	D	L	H
2"	60.32	66.2	24	65.3	
3"	88.9	93.0	40.8	91.0	
4"	114.3	118.7	43.5	104.2	

## DWV TEE

ITEM NO.:D05

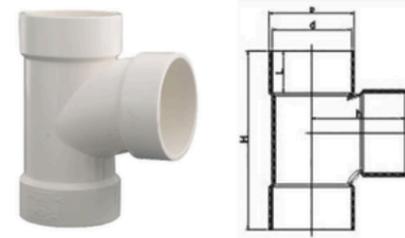

Size	Nom	d	D	L	H	h
1-1/2"	48.26	56.8	17.6	109.3	63.2	
2"	60.32	68.8	19.2	130.0	75.0	
3"	88.90	100.7	38.2	199.8	115.0	
4"	114.30	127.7	44.6	247.0	139.5	
6"	168.28	183.3	76.5	380.0	205.0	

## DWV PVC PIPE


ITEM NO.:D29



Size							
1-1/4"	1-1/2"	2"	3"	4"	6"	8"	

## DWV VENT CAP


ITEM NO.:D11

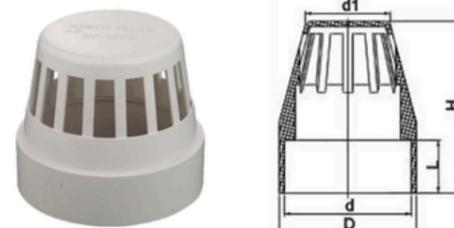

Size	Nom	d	d1	D	L	H
2"	60.32	29.0	67.8	19.2	72.0	
3"	88.90	45.0	96.4	38.2	93.9	
4"	114.30	84.0	120.8	32.5	102.0	

## DWV Y-TEE


ITEM NO.:D07

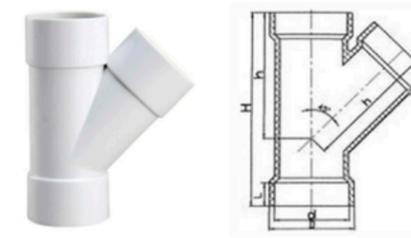

Size	Nom	d	D	L	h	H
1-1/2"	48.26	56.8	17.6	90.8	138.8	
2"	60.32	68.8	19.2	109.3	165.8	
3"	88.9	100.7	38.2	165.2	241	
4"	114.3	127.7	44.6	205.4	298.4	
6"	168.28	183.3	76.5	306	443	

## DWV MALE ADAPTER

ITEM NO.:D 13

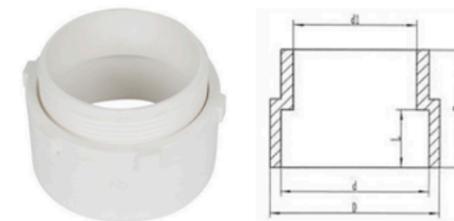

Size	Nom	d	d1	D	L	H
2"	60.32	50.2	69	23.2	47.5	

## S-TRAP WITHOUT CLEAN OUT


ITEM NO.:D16



Size	Nom	d	D	L
1-1/2"	48.26	54.2	18.5	
2"	60.32	69.0	25.0	

## DWV TRIPLE

ITEM NO.:D12

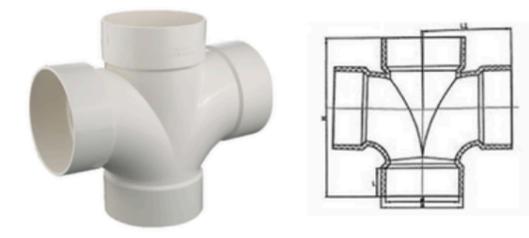

Size	Nom	d	d1	D	L	H
4"	114.3	127.7	44.6	137.7	247	

## DWV REDUCING BUSHING


ITEM NO.:D15



Size	Nom	d	D	L	H
2"×1-1/2"	48.26	68.8	17.4	32.5	
4"×2"	60.32	114.7	23.1	49.2	
3"×2"	60.32	89.4	19.6	40.6	
4"×3"	88.90	114.7	34.5	51.5	

## S-TRAP WITH FEMALE CLEAN OUT

ITEM NO.:D23

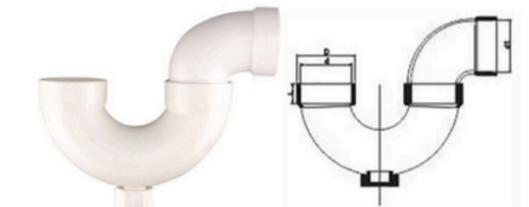

Size	Nom	d	D	L
1-1/2"	48.26	54.2	18.5	
2"	60.32	69.0	25.0	

DWV PLUG							ITEM NO.:D10
Size	Nom	d	d1	D	NPT	H	h
1-1/4"		42.16	38	47.3	1-1/4"	15.5	38.6
1-1/2"		48.26	40	56.8	1-1/2"	17.7	41.5
2"		60.32	52	68.8	2"	19.3	45.5
3"		88.9	77.4	100.7	3"	38.3	73.5
4"		114.3	101.2	127.7	4"	44.7	82.8
6"		168.28	156	247.2	6"	75	120

DWV END CAP					ITEM NO.:D14
Size	Nom	d	D1	D2	H
2"		60.32	64.1	66.3	23.5
3"		88.90	92.4	94.3	25.6
4"		114.30	120.2	122.5	28.3
6"		168.8	173.8	173.8	50

## 2.4 Sockets and Wall Plates

### 2.4.1-Wall Plate

Photo	Model	Description
	YGC-009-NS	Screwless plastic wall plate 1gang
	YGC-004-NS	Screwless plastic wall plate 2gang
	YGC-005-NS	Screwless plastic wall plate 3gang

Photo	Model	Description
	YGC-034	Plastic wall plate with 6 hole screws 3 gang
	YGC-035	Plastic wall plate with 8 hole screws 4 gang
	YGC-038	Double socket wall platecover single screw hole

Photo	Model	Description
	YGC-006-NS	Screwless plastic wall plate 4gang
	YGC-039	Screwless plastic wall plate 5gang
	YGC-040	Screwless plastic wall plate 6gang
	YGC-032	Plastic wall plate with 2hole screws 1gang
	YGC-033	Plastic wall plate with 4 hole screws 2gang
	BABN-001	Ground fault circuit interrupter extension ring, nylon, ivory
	BAC-001	ICC decorex blank insert, white
	ANT-IUC1V	Weatherproof GFCI outlet in use outdoor clear cover 1 gang
	ANT-IUC1V-1	Weatherproof GFCI outlet in use outdoor vertical horizontal clear cover 1 gang

Photo	Model	Description
	YGC-041	Blank plates, one gang
	YGC-042	Blank plates, two gang
	YGC-008D	Blank plates, one gang, white
	YGC-010D	Single gang toggle switch plate
	YGC-002D	Double socket wall plate cover double screw hole
	ANT-TP17	1 Gang aluminum weatherproof twist lock cover
	ANT-TP17-1	Aluminum duplex receptacle vertical cover grey
	ANT-PW12	Two cover plastic protective wall plate for receptacle
	ANT-BW13	Black auto-closing lid outdoor outlet wall plate cover

## Devis Waterproof Cover

Wiring Devis waterproof cover for 20A 30A Flanged Outlet & Inlet.

PHOTO	Model	Description
	ANT-B160	Wiring Devis waterproof cover for 20A 30A Flanged Outlet & inlet, Ip54 (internal testing)

## Locking Flanged Outlet

Nema L14-30 Locking Flanged Outlet , 30A 125/250V , 3 Pole 4 Wire Grounding Industrial Grade

PHOTO	Model	Description
	ANT1430FO	Nema L14-30 Locking Flanged Outlet , 30A 125/250V , 3 Pole 4 Wire Grounding Industrial Grade, matching with ANT-B160

## 2.4.2-GFCI

Photo	Model	Description
	YGB-092 YGB-092WR YGB-092NL YGB-092NL-WR	Power socket grounding fault circuit breaker GFCI 125V 15A
	YGB-093 YGB-093WR YGB-093NL YGB-093NL-WR	20A 125V GFCI outlet
	BAS-002 BAS-002WR	Power outlet ground fault circuit interrupter GFCI
	BAS-003 BAS-003WR	20A 125V dual GFCI wall socket
	BAS-004 BAS-004WR	15A 125V dual GFCI wall socket
	BAS-005 BAS-005WR	Commercial household lights American outlet, GFCI power outlet

Photo	Model	Description
	YGB-094 YGB-094W YGB-094NL YGB-094NL-WR	Anti-theft retrofit GFCI power outlet
	YGB-095 YGB-095WR YGB-095NL YGB-095NL-WR	Self-check multiple electrical GFCI socket tamper-proof GFCI wall socket
	non self test GFCI	GFCI socket duplex 20A
	BAA-001 BAA-001WR	Electrical receptacle, 15A 125V colored wall receptacle
	BAA-002 BAA-002WR	GFCI socket, electrica socket with combination switch

## 2.4.3-Smart Items

Photo	Model	Description
	BAA-018	Plug extender with 2 power outlets and 2 USB ports cube wall charger
	BAA-030	American plug adapter, multi-plug socket extender
	BAA-032	Power socket duplex socket with 2 USB ports
	BAA-35	Power duplex wall receptacle

Photo	Model	Description
	BSC-004	Networks UniFi smart power plug
	BSC-005 BCP-002	Us power outlet desk socket with USB charging tower
	BSC-006 BCP-003	Surge protector power board tower type
	BCU-001 BSC-007	Wall mounted adapter charging

## 2.4.4-Humidity Sensor

Photo	Model	Description
	BSS-001	PIR motion sensor light switch

## 2.4.5-USB Socket

Photo	Model	Description
	BAA-016	15A 125V USB wall outlet adapter with 2 USB socket
	BAS15-2USB TR-BAS15-2USB	125V 15A electric 4. 2A dual USB wall outlet for convenient charging

Photo	Model	Description
	BAA-023	USB tamper-proof socket TR with 2 USB ports
	BAA-023D	20A 125V charging power socket with USB port,UL certified



Photo	Model	Description
	BAS20-2USB TR-BAS20-2USB	USA type tamper resistant electric duplex wall socket with 2 USB charger 20A 125V
	BAA-015	125V 15A electric 4.2A dual USB wall outlet for convenient charging
	BAA-015D	USA type tamper resistant electric duplex wall socket with 2 USB charger 20A 125V
	BAA-017	125V 15A electric wall outlet for convenient charging with double Type-C

Photo	Model	Description
	BAO-005	15A 125V charging power outlet with 4 USB ports
	BAO-006	USB wall outlet adapter with 2 USB and 2 Type-C socket
	BAO-007	15A 125V charging power outlet with 4 Type-C ports

Photo	Model	Description
	BAG-003	Outdoor lighting PIR motion sensor, switch motion detection sensor

## 2.4.6-Dimmer Switch

Photo	Model	Description
	BAK-004A BAK-004AG	Household 120V 15A warped plastic wall light switch, white

Photo	Model	Description
	BAK-008	Dimmer switch for led lights, UL certified, white 15A 125V

## 2.4.7-PIR Sensor

Photo	Model	Description
	BAG-001 BAG-001C	Motion detector sensor light switch 1000W 1/4HP unipolar 120V, 60Hz, UL certified
	BAG-002	Outdoor lighting PIR motion sensor, switch motion detection sensor

Photo	Model	Description
	BAG-004	Motion sensor lamp infrared human body sensor probe switch ceiling light sensor head modification module AC 220V
	BAG-005	Outdoor lighting PIR motion sensor, switch motion detection sensor

## 2.4.8-Switch Socket

Photo	Model	Description
	YGD-001	15A push-in and side wired 120-277V single pole switch white
	YGD-002	Commercial grade decorative double rocker switch, 15A 120V/277V, white
	BAK-001	Canadian American single control toggle switch socket
	BAK-003	15A side wired only 120-277V four-way white
	BAK-006	15A 125V US gauge dual toggle switch
	BCC-004	6 socket extenders, ground wall faucet, adapter spacer socket

Photo	Model	Description
	YGB-045	Grounding duplex heavy duty socket, self-grounding clamp, 3 forks, 15A 120V, UL certified, white
	YGB-047	Grounding duplex heavy duty socket, self-grounding clamp, 3 forks, 15A 120V, UL certified, white
	YGB-048	20A 125V dual power TR outlet white with transformer required
	YGB-050	20A 125V dual power outlet white with transformer required
	BAS-011	15A 125/250V, narrow-body duplex socket, straightblade, commercial grade, self-grounded, dual voltage, white
	BAS-012	20A 125V, ultra-thin double-sided printer socket white with transformer required

### 2.5 Wire Connectors

#### Waterproof nylon wire nuts

Picture	Model	MIN	MAX	COLOR
	P4	2#18	2#12 w/2#14	Orange

#### Winged waterproof nylon wire nuts

Picture	Model	MIN	MAX	COLOR
	W2	2#18	2#10 w/2#12 w/ 2#14 w/2#16	ivorywhite (+Black)
	W3	2#18	2#8 w/2#10 w/2#12 w/ 2#14 w/2#16	Red(+Black)

### Winged Twist On Wire Connector

Model	Color	Tube	Dimension				Wire Range	Packing
			A mm	B mm	C mm	D mm		
W1	Yellow	Yellow	6.7	10	18.9	9.8	18-10 AWG	100pcs/bag
W2	Tan	Tan	8.4	10.7	19	9.8	18-8 AWG	
W3	Red	Red	9.4	13.3	22.9	10.5	18-8 AWG	
W4	Grey	Grey	10.5	14.4	24.5	10.8	18-10 AWG	
W5	Blue	Blue	12.8	17.3	31.8	13.5	12-8 AWG	



### Twist-On Wire Connector

Model	Color	Tube	Dimension			Wire Range	Packing
			A mm	B mm	C mm		
P1	Orange/Grey	Steel	6.7	8.6	15.2	22-14 AWG	1000pcs/bag 20000pcs/carton
P2	Orange/Blue		7.4	9.8	17.6	22-14 AWG	1000pcs/bag 10000pcs/carton
P3	Orange		9.9	12.7	22	22-14 AWG	500pcs/bag 5000pcs/carton
P4	Orange/Yellow		11.2	14	24.6	22-10 AWG	500pcs/bag 5000pcs/carton
P6	Orange/Yellow		13.3	16.4	26.5	22-10 AWG	



### Twist-On Wire Connector H Type (With Stair)

Picture	Model	Tube	Dimension			Wire Range
			A mm	B mm	C mm	
	P4H	Steel	11.1	14	24.6	22-10 AWG

### Wire Connector

Picture	Model	Wire range	Dimensions (mm)		
			L	W	H
	GC222-2	0.2-2.5mm	12.8	19.6	15.2
	GC222-3	0.2-2.5mm	18.2	19.6	15.2
	GC222-4	0.2-2.5mm	23.6	19.6	15.2

Picture	Model	Wire range	Dimensions (mm)		
			L	W	H
	GC222-5	0.2-25mm	29	19.6	15.2

**GC222-5**

### QUICK CONNECT

Picture	Model	Amp Rating	Ports	Suitable Wire	Color
	T301632	32	2	0.75mm2-4.0 mms solid or 1.5mm2-2.5mm2 stranded	Red
	T301633	32	3	0.75mm2-4.0 mms solid or 1.5mm2-2.5mm2 stranded	Orange
	T301634	32	4	0.75mm2-4.0 mms solid or 1.5mm2-2.5mm2 stranded	Yellow

**T301632**

**T301633**

**T301634**

### Electrical tape

ITEM NO.	SIZE	COLOR	PKG
ET-001	0.18mm x 19mm x 18m(60ft)	Black	200
ET-002	0.18mm x 19mm x 18m(60ft)	Blue	200
ET-003	0.18mm x 19mm x 18m(60ft)	Green	200
ET-004	0.18mm x 19mm x 18m(60ft)	Red	200
ET-005	0.18mm x 19mm x 18m(60ft)	White	200
ET-006	0.18mm x 19mm x 18m(60ft)	Yellow	200



## 2.6 Cable Wire and Other Accessories

### Nail Plates

PHOTO	ITEM NO.	SIZE
	99PP	1-1/2"x 2-3/4"
	99PP-2	1-1/2"x 6"

### Grounding Screw

The grounding screws perform reliably and meet electrical code requirements, with many appreciating their dual head design for versatile use.

PHOTO	ITEM NO.	SIZE
	ANT-784	#10 3/4"
		#10 1"
		#10 1-1/4"
		#10 1-1/2"
	10/32 x 3/8"	#10 2"
		Slotted Head
Material: Carbide		• Slotted Head
		• #10-32 Threads
		• Material: Carbide

### Grounding Pigtail

Green insulated #14 AWG solid wire. #10-32 x 3/8 green grounding screw on one end. The other end contains a fork terminal. Used to ground devices to steel boxes.

PHOTO	ITEM NO.	Length	Wire AWG	Wire	Screw
	S12-60	6 inch	#12	solid	#10-32x 3/8
	S12-65	6.5 inch	#12	solid	#10-32x 3/8
	S12-70	7 inch	#12	solid	#10-32x 3/8
	S12-75	7.5 inch	#12	solid	#10-32x 3/8
	N12-70	7 inch	#12	stranded	#10-32x 3/8
	N12-75	7.5 inch	#12	stranded	#10-32x 3/8
	S14-65	6 inch	#14	solid	#10-32x 3/8
	S14-70	7.5 inch	#14	solid	#10-32x 3/8
	S14-75	7.5 inch	#14	stranded	#10-32x 3/8
	S14-65	6 inch	#14	solid	#10-32x 3/8
	S14-70	7.5 inch	#14	stranded	#10-32x 3/8
	S14-75	8 inch	#14	solid	#10-32x 3/8
N14-80	8 inch	#14	stranded	#10-32x 3/8	

## Nylon Cable Tie

The type of fastener used to hold items together, mainly cable and wire, (made of UL approved nylon 66).

PHOTO	ITEM NO.	Size	Screw
	ANT 4.8x150	4.8x150	#10-32x3/8
	ANT 4.8x200	4.8x200	#10-32x3/8
	ANT 4.8x300	4.8x300	#10-32x3/8
	ANT 4.8x350	4.8x350	#10-32x3/8
	ANT 4.8x380	4.8x380	#10-32x3/8
	ANT 5.2x200	5.2x200	#10-32x3/8
	ANT 5.2x200	5.2x200	Black/Clear
	ANT 5.2x300	5.2x300	

## Metal Staple

Polyethylene Insulated Metal Staple

PHOTO	ITEM NO.	SIZE
	ANT 550	½ Inch., 14/2 & 12/2 (NM)

## Cable Stacker

Non-M Metallic Nai-On Cable Stacker White. Material: PVC

PHOTO	ITEM NO.	SIZE
	ANT 333	white
	ANT 444	Red

## Metal Cables Staples

Metallic Silver Safety Cable Staples. Material: Carbon Steel

PHOTO	ITEM NO.	SIZE
	ANT668	1/2"x1"

## Class RK5 Fuses

A general purpose, one time, NON-current limiting cartridge fuse. These class K-5 fuses are for light duty circuit locations.

PHOTO	Model Number	Ampere Range
	ANT-RK5-10A	10A
	ANT-RK5-20A	20A
	ANT-RK5-30A	30A
	ANT-RK5-40A	40A
	ANT-RK5-50A	50A
	ANT-RK5-60A	60A

## Miniature Circuit Breakers

Suitable for protection of main circuit devices.

PHOTO	ITEM NO.	No. of poles	Ampere Rating	AC Volts
	ANTBIU-60C05/1	1	5	120/240Vac
	ANTBIU-60C05/2	2	5	120/240Vac
	ANTBIU-60C05/3	3	5	240Vac
	ANTBIU-60C10/1	1	10	120/240Vac
	ANTBIU-60C10/2	2	10	120/240Vac
	ANTBIU-60C15/1	1	15	240Vac
	ANTBIU-60C15/2	3	15	240Vac
	ANTBIU-60C20/1	1	20	120/240Vac
	ANTBIU-60C20/2	2	15	240Vac
	ANTBIU-60C15/3	3	15	240Vac
ANTBIU-60C20/1	1	20	120/240Vac	
ANTBIU-60C20/2	3	25	240Vac	
ANTBIU-60C25/3	3	25	240Vac	
ANTBIU-60C30/1	1	30	120/240Vac	
ANTBIU-60C30/2	3	25	240Vac	
ANTBIU-60C30/3	3	25	240Vac	
ANTBIU-60C35/1	1	30	120/240Vac	
ANTBIU-60C40/2	3	30	240Vac	
ANTBIU-60C40/3	3	40	240Vac	
ANTBIU-60C45/1	1	35	120/240Vac	
ANTBIU-60C40/2	3	40	120/240Vac	
ANTBIU-60C45/3	3	45	240Vac	
ANTBIU-60C50/1	1	60	120/240Vac	
ANTBIU-60C50/2	1	60	120/240Vac	
ANTBIU-60C50/3	3	60	240Vac	
ANTBIU-60C60/1	2	60	120/240Vac	
ANTBIU-60C60/3	3	60	240Vac	
ANTBIU-60C60/3	3	60	120/240Vac	

## Insulated Multi-Tap Connectors Single Sided Entry

PHOTO	MODEL	Conductor Type	Body Material	AWG Range	Size (In.)	Size (In.)		
						L	W	H
	QMS-D1/0-1	Both Aluminum and Copper	6061-T6 Aluminum	1/0-14AWG	2.99 x 0.95	2.99	0.95	1.42
	QMS-D1/0-1			1/0-14AWG	1.63 x 1.33	1.63	1.7	1.32
	QMS-D2-2			2-14AWG	2.44 x 0.95	2.44	0.8	1.22
	QMS-D2-1			2-14AWG	1.35 x 1.52	1.35	1.57	1.22
	QMS-D2/0-1			6AWG-250cm	3.15 x 1.15	3.15	0.99	1.52
	QMS-D2/0-1			3/14-6AWG	1.82 x 1.17	1.63	1.61	1.62
	QMS-D2/0-1			3/0-6AWG	1.80 x 1.26	1.82	1.38	1.61
	QMS-D2/0-1			3/466AMC	2.66 x 1.30	2.35	1.69	1.52
	QMS-D250-1			4/1-1AWG	3.15 x 1.22	1.15	1.38	1.22
	QMS-D340-2			6AWG-250kcmil	3.68 x 2.57	3.63	2.44	2.58
	QMS-D500-1	3/0-6AWG	1.92 x 1.33	2.35	1.25	2.56		
	QMS-D590-1	4-14AWG	1.56 x 1.23	1.16	1.33	1.26		
	QMS-D540-1	4-14AWG	1.36 x 1.23	1.16	1.33	1.26		
	QMS-D560-2	6AWG-250kcmil	3.98 x 2.22	3.98	2.22	2.71		
	QMS-D600-1	4AWG-500kcmil	5.15 x 2.22	3.98	2.84	2.58		
	QMS-D600-2	4AWG-600kcmil	3.52 x 2.84	1.66	1.51	2.87		
	QMS-D600-3	4AWG-600kcmil	3.28 x 2.22	2.69	2.5	2.58		
	QMS-S500-3	4AWG-500kcmil	4 x 2.69	2.69	2.58	2.58		

## Circle Cable Clips (PE)

Single/double nail cable clips

PHOTO	ITEM NO.	W (mm)	H (mm)	Nail AG (mm)
	ANT-NC04	4	5.3	1.7X14
	ANT-NC05	5	6	1.7X14
	ANT-NC06	6	8	1.7X16
	ANT-NC07	7	8.7	1.7X16
	ANT-NC08	8	9.5	1.9X19
	ANT-NC09	9	11	2.0X22
	ANT-NC10	10	12	2.0X22
	ANT-NC14	14	16.5	2.5X28
	ANT-NC16	16	18	2.2X32
	ANT-NC18	18	20.5	2.5X35
	ANT-NC20	20	22.5	2.5X38
	ANT-NC22	22	23.5	2.5X38
	ANT-NC25	25	26.5	3.0X45
	ANT-NC30	30	32.5	3.0X48
	ANT-NC32	32	34.5	3.0X52



NEWTON  
ELECTRIQ